





Recessed RGB LED Soft Beam
Wall Light

- LED Wave Length
- Optics
- R =620-630 nm
 - G =520-530 nm
 - B =460-470 nm
 - N/A

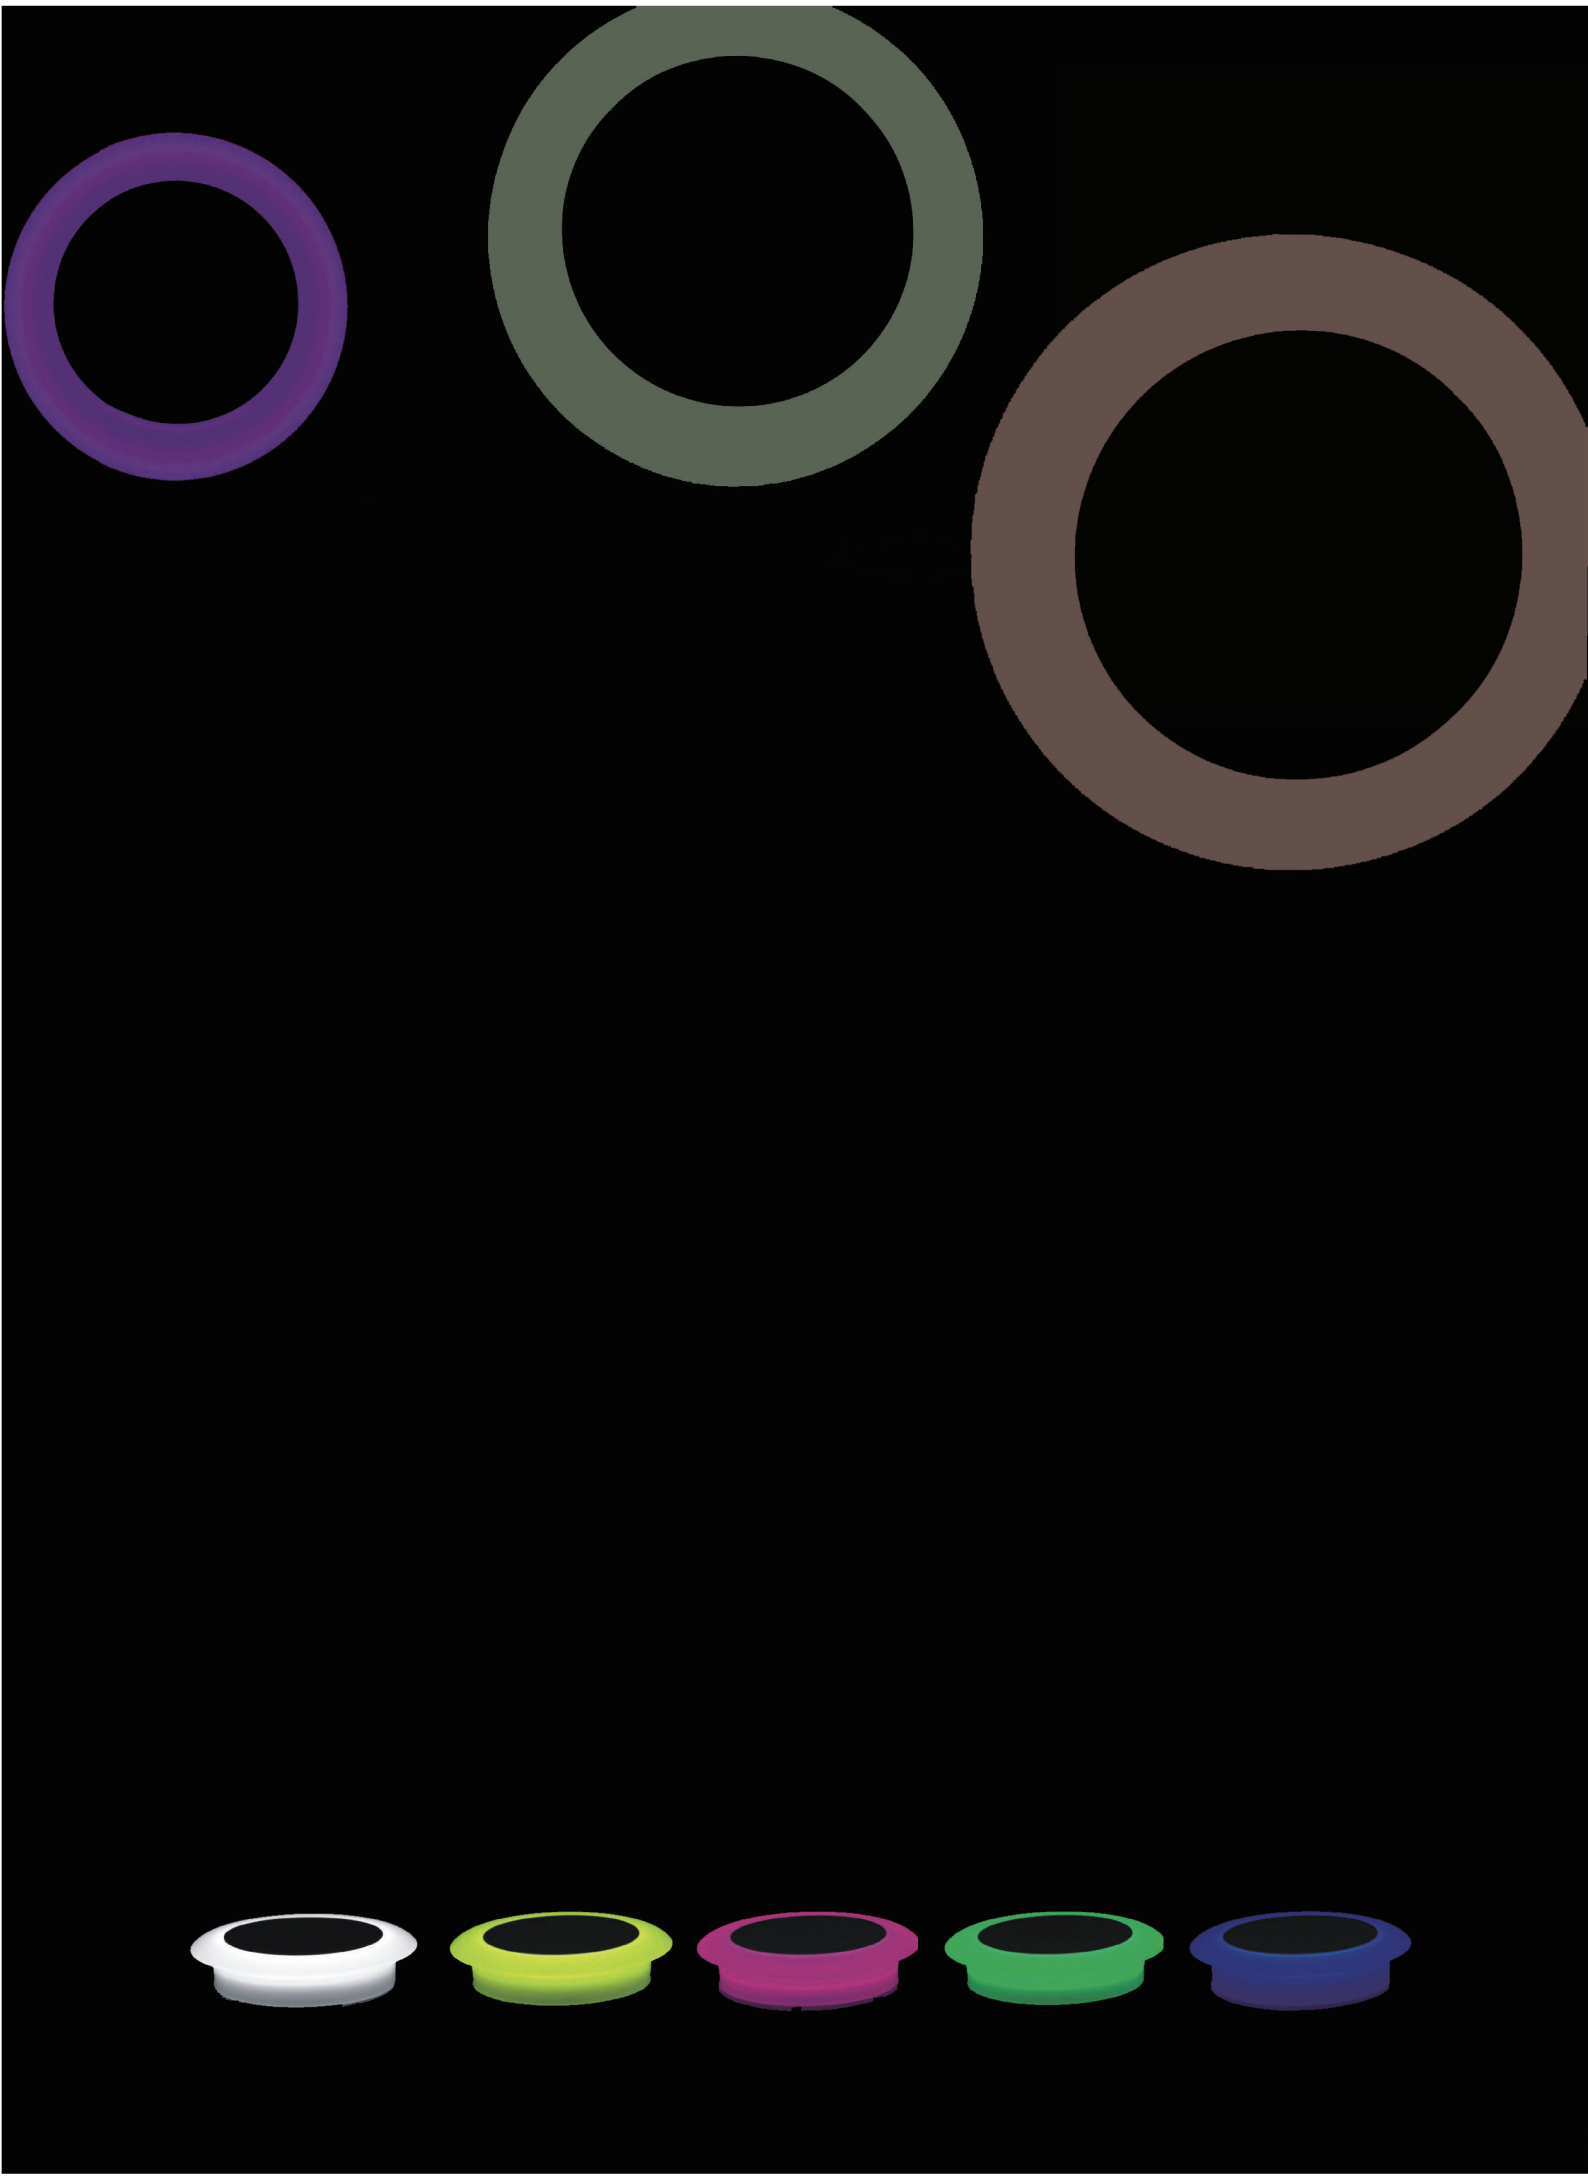

Outer Dimensions Unit:mm

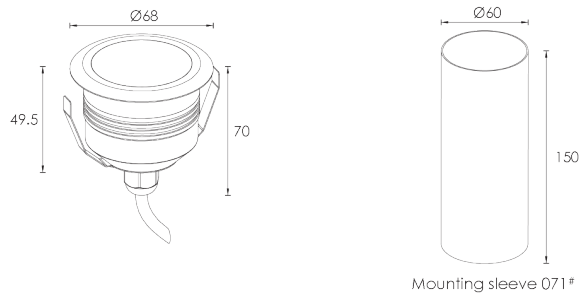

Material specifications

Housing	12# Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Light Window	50% transmittance PC cover
Waterproof seal	Rubber seal
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 4X0.75mm² L=0.5m
Mounting sleeve	ABS Ø71#

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D1B00118	1×3W RGB 3in1 Full color	24V DC	R = 38 G = 53 B = 54	3.5	8	09

