

Small Type Recessed LED Pool Light Completely Stainless Steel SUS 316# Housing and Accessories



LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics



B33(B33D/B33F)
L0109F023YH 9°
L0115D023YH 15°
L0120D023YH 20°
L0130D023YH 30°
L0145D023YH 45°

B33(B33D/B33F)



9°(B33F)



15°




20°



30°



45°

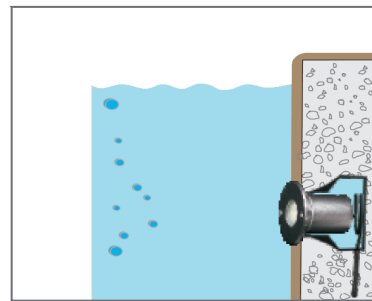


Water must be allowed to go inside and outside sleeve freely without leaking to the other side.

Warning:
Must be installed under the water to prevent the light from being burnt off because of over-heating.

Outer Dimensions

Unit:mm

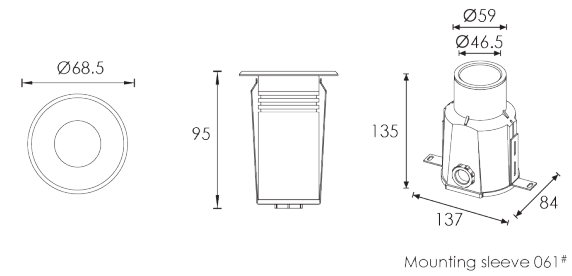

Material specifications

Front cover & Housing	Hard chromeplated molding shaped stainless steel SUS 316#
Light Window	Step tempered glass.T=7mm
Gasket	Silicone Gasket
Lens	Optical lens,efficiency≥85%
PCB	Excellent heat conductivity aluminum.coefficient of heat Conductivity≥2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 2X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C~40°C less than 1 meter depth.
Mounting sleeve	Ø61# ABS
Dimmable Support	Triac PWM 1-10V Dali

Item	Light source	Lens	The manufacturer selected lens degree(°)±1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
B4A0158	1×3W	B33D	30°	24VDC	110	2.6	Cool white=174 Warm white=139	06

