

Wall Recessed LED Pool Light  
Completely Hard chromeplated Stainless Steel SUS 316L# Housing and Accessories



LED Colour Temperature


- 2000K
- 3000K
- 6000K

Optics




B32
L0120F024PS 20°
L0125F024PS 25°
L0130F024PS 30°
L0135F024PS 35°
L0135F024PS 45°

B32

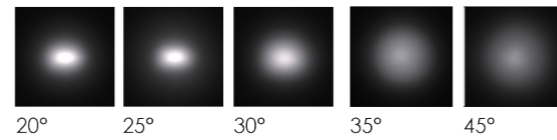

Outer Dimensions

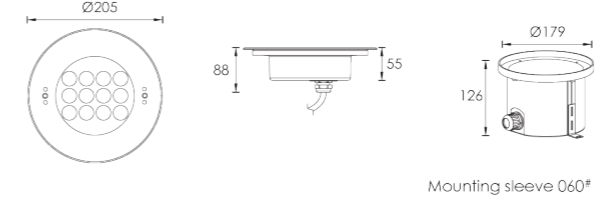


Material specifications

Front cover & Housing	Molding shaped hard chromeplated stainless steel SUS 316L#
Light Window	Step tempered glass.T=10mm
Gasket	Silicone Gasket
Lens	All-in-one Optical lens,efficiency≥85%
PCB	Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk
Cable gland	IP68 PG-11 copper with nickel-coated
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 2X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C~40°C less than 1 meter depth.
Built-in Overheat Sensor System	Automatic Shutdown at 75°C
Mounting sleeve	ABS 060*
Dimmable Support	Triac PWM 1-10V Dali



Built-in Radiator

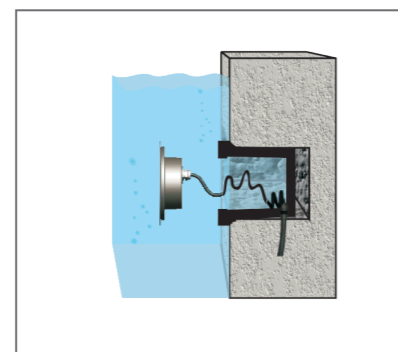

Water must be allowed to go inside and outside sleeve freely without leaking to the other side.

**Warning:**  
Must be installed under the water to prevent the light from being burnt off because of over-heating.

Item	Light source	Lens	The manufacturer selected lens degree(°)@1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
<b>B4ZB1257</b>	12x2W Single color	B32	30°	24V DC	1200	28.8	Cool white=1361 Warm white=1156	08

