

Asymmetrical

Small Type Recessed LED Pool Light
Completely Stainless Steel SUS 316# Housing and Accessories



LED Colour Temperature	Optics
<ul style="list-style-type: none"> • 2000K • 3000K • 6000K 	 <p>L01 45/35 F023YH 30°</p>


C9



45°
35°


Outer Dimensions

Unit:mm

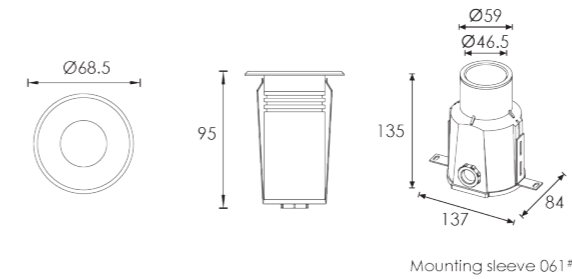


Material specifications

Front cover & Housing	Hard chromeplated molding shaped stainless steel SUS 316#
Light Window	Step tempered glass.T=7mm
Gasket	Silicone Gasket
Lens	Optical lens,efficiency≥85%
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity≥2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 2X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C~40°C less than 1 meter depth.
Mounting sleeve	Ø61# ABS
Dimmable Support	Triac PWM 1-10V Dali

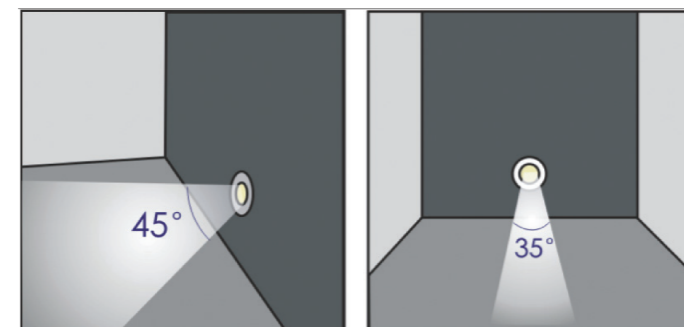

Impression drawing of C4A0158

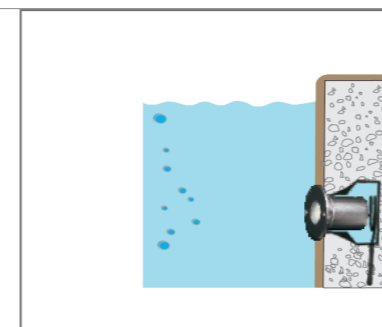

Water must be allowed to go inside and outside sleeve freely without leaking to the other side.

Warning:
Must be installed under the water to prevent the light from being burnt off because of over-heating.

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
C4A0158	1×3W	C9	45° 35°	24VDC	110	2.6	Cool white=143 Warm white=115	06

