

Asymmetrical
Wall Recessed LED Pool Light
Completely Hard chromeplated Stainless Steel SUS 316L# Housing and Accessories



OverHeat Sensor
Inside



LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics






C8
L01 45° F024PS
35°

C8



45°
35°




Built-in Radiator

Water must be allowed to go inside and outside sleeve freely without leaking to the other side.
Warning:
Must be installed under the water to prevent the light from being burnt off because of over-heating.

Outer Dimensions

Unit:mm

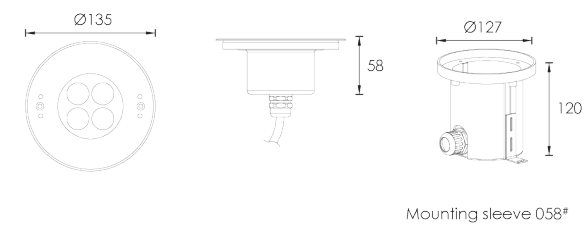

Mounting sleeve Ø58*

Material specifications

Front cover & Housing	Hard chromeplated molding shaped stainless steel SUS 316L#
Light Window	Step tempered glass,T=8mm
Gasket	Silicone gasket
PCB	Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk
Cable gland	IP68 PG-11 copper with nickel-coated
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 2X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C~40°C less than 1 meter depth.
Built-in Overheat Sensor System	Automatic Shutdown at 75°C
Mounting sleeve	Ø58* ABS
Dimmable Support	Triac PWM 1-10V Dali

Item	Light source	Lens	The manufacturer selected lens degree(°)ø1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
C4XC0457	4×2W	C8	45° 35°	24V DC	371	8.9	Cool white=511 Warm white=450	08

