




Recessed LED wall washer with white powder coated anti-glare die-cast housing, high thermal conductive heat sink and energy efficient electronic driver, Different shape of housing can be chosen in different application .

Application: living rooms, corridors, shops, shopping mall, hotel, restaurants.



Frosted Glass



Clear Glass



Model	P	H
FS6001-09	Max.9W	104
FS6001-15	Max.15W	116

Operating Temp. : -30°C + 40°C

7.5W / 13.5W COB chip (DC200mA / DC350mA)

- 2700K/639lm 1065lm Ra90
- 3000K/702lm 1170lm Ra90
- 4000K/792lm 1320lm Ra80
- 5000K/882lm 1425lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10v/Triac

Beam angle



Color selection





Model	P	H
FS6002-09	Max.9W	104
FS6002-15	Max.15W	116

Operating Temp. : -30°C + 40°C
 7.5W / 13.5W COB chip (DC200mA / DC350mA)
 ■ 2700K/639lm 1065lm Ra90
 ■ 3000K/702lm 1170lm Ra90
 ■ 4000K/792lm 1320lm Ra80
 ■ 5000K/882lm 1425lm Ra70



Remote Driver: AC100-240V 50/60Hz
 Driver performance: Non-dimmable/dimmable
 Dimmer: DALI/0~10v/Triac



Beam angle: 15° / 25° / 38°



Color selection




Model	P	H
FS6003-09	Max.9W	104
FS6003-15	Max.15W	116

Operating Temp. : -30°C + 40°C
 7.5W / 13.5W COB chip (DC200mA / DC350mA)
 ■ 2700K/639lm 1065lm Ra90
 ■ 3000K/702lm 1170lm Ra90
 ■ 4000K/792lm 1320lm Ra80
 ■ 5000K/882lm 1425lm Ra70


Remote Driver: AC100-240V 50/60Hz
 Driver performance: Non-dimmable/dimmable
 Dimmer: DALI/0~10v/Triac




Beam angle



Color selection



HOTEL DOWNLIGHT



Model	P	H
FS6004-09	Max.9W	104
FS6004-15	Max.15W	116

Operating Temp. : -30°C + 40°C

7.5W / 13.5W COB chip (DC200mA / DC350mA)

■ 2700K/639lm 1065lm Ra90

■ 3000K/702lm 1170lm Ra90

■ 4000K/792lm 1320lm Ra80

■ 5000K/882lm 1425lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac



Frosted Glass





Clear Glass

Beam angle: 15° / 25° / 38°



Color selection





Model	P	H
FS6006-20	Max.20W	139
FS6006-30	Max.30W	154
FS6006-42	Max.42W	179

Operating Temp. : -30°C + 40°C

18W COB chip (DC500mA)

- 2700K/1260lm Ra90
- 3000K/1418lm Ra90
- 4000K/1585lm Ra80
- 5000K/1764lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac




Beam angle



Color selection





Model	P	H
FS6007-20	Max.20W	139
FS6007-30	Max.30W	154
FS6007-42	Max.42W	179

Operating Temp. : -30°C + 40°C

18W COB chip (DC500mA)

■ 2700K/1260lm Ra90

■ 3000K/1418lm Ra90

■ 4000K/1585lm Ra80

■ 5000K/1764lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac



Frosted Glass






Clear Glass

Beam angle: 15° / 24° / 38°



Color selection

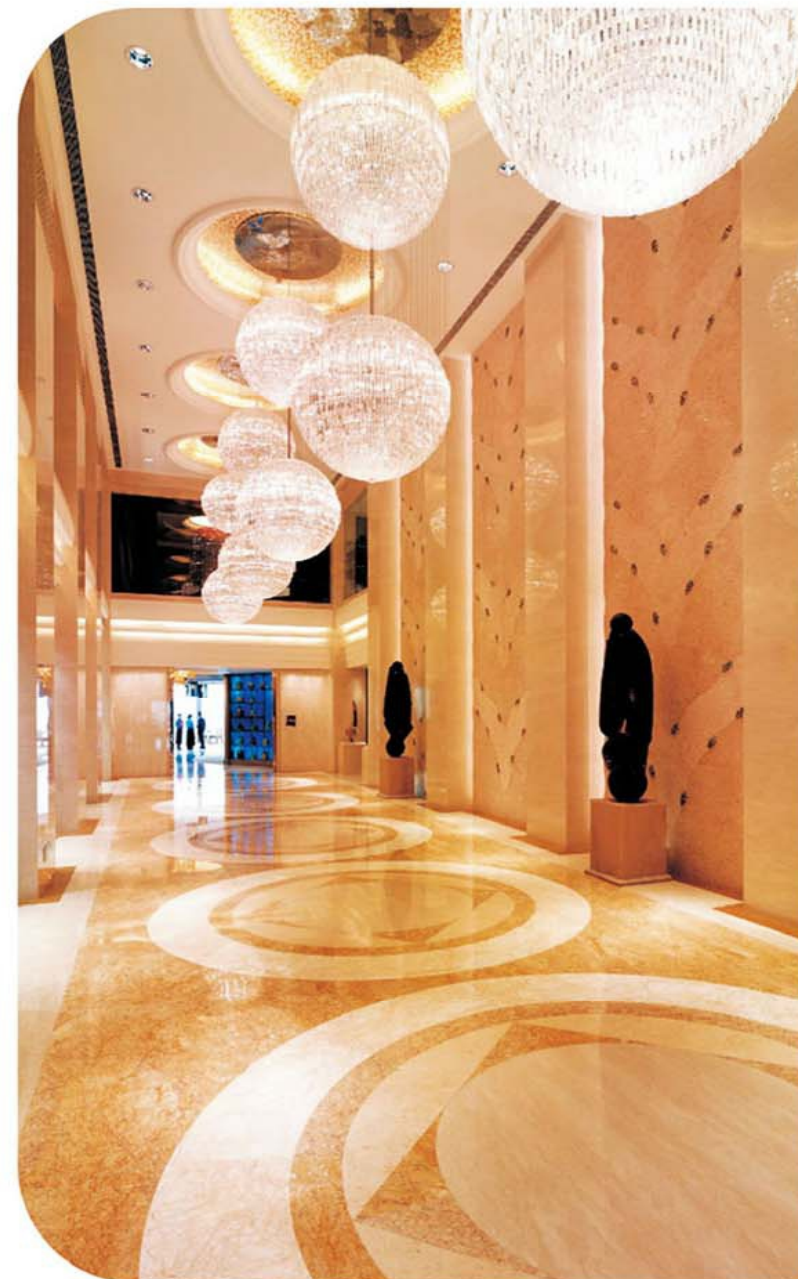



Model	P	H
FS6010-30	Max.30W	151
FS6010-42	Max.42W	176

Operating Temp. : -30°C + 40°C

27W COB chip (DC700mA)

- 2700K/2106lm Ra90
- 3000K/2280lm Ra90
- 4000K/2640lm Ra80
- 5000K/2880lm Ra70



Remote Driver: AC100-240V 50/60Hz
 Driver performance: Non-dimmable/dimmable
 Dimmer: DALI/0~10v/Triac



Beam angle



Color selection



FS5039-12

Max.12W

Operating Temp. : -30°C + 40°C

10W COB chip (DC250mA)

- 2700K/845lm Ra90
- 3000K/936lm Ra90
- 4000K/1068lm Ra80
- 5000K/1165lm Ra70

Remote Driver: AC100-240V 50/60Hz
 Driver performance: Non-dimmable/dimmable
 Dimmer: 0~10v/Triac

Beam angle



Color selection

