

FS3020-40

Max.40W

Operating Temp. : -30°C + 40°C

35W COB chip (DC900mA)

■ 2700K/2815lm Ra90

■ 3000K/3120lm Ra90

■ 4000K/3520lm Ra80

■ 5000K/3925lm Ra70

Remote Driver: AC100-240V 50/60Hz



Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac

Beam angle



Color selection



FS4010B-18

Max.18W

Operating Temp. : -30°C + 40°C

16W COB chip (DC450mA)

■ 2700K/1260lm Ra90

■ 3000K/1405lm Ra90

■ 4000K/1584lm Ra80

■ 5000K/1766lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac


Beam angle



Color selection



PENDENT LIGHT



Model	P	H	H1
FS4010D-12	Max.12W	143	108
FS4010D-18	Max.18W	163	128
FS4010D-22	Max.22W	173	138

Operating Temp. : -30°C + 40°C
16W COB chip (DC450mA) / FS4010D-18



- 2700K/1260lm Ra90
- 3000K/1405lm Ra90
- 4000K/1584lm Ra80
- 5000K/1766lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac

Beam angle



Color selection



FS4001B-26 Max.26W

Operating Temp. : -30°C + 40°C
23W COB chip (DC600mA)

- 2700K/1820lm Ra90
- 3000K/2028lm Ra90
- 4000K/2288lm Ra80
- 5000K/2550lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Beam angle



Color selection



PENDENT LIGHT

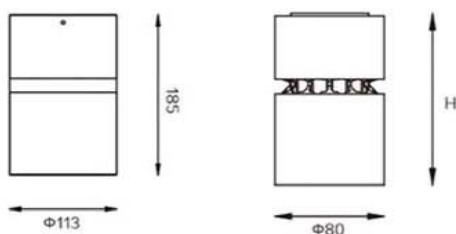

Model	P	H
FS3019-40	Max.40W	185
FS4010C-12	Max.12W	108
FS4010C-18	Max.18W	128
FS4010C-22	Max.22W	138

Operating Temp. : -30°C + 40°C
37W COB chip (DC1000mA) / FS3019-40

- 2700K/2815lm Ra90
- 3000K/3120lm Ra90
- 4000K/3520lm Ra80
- 5000K/3925lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac



Beam angle



Color selection

