


Recessed
LED Stair Light and Wall Light


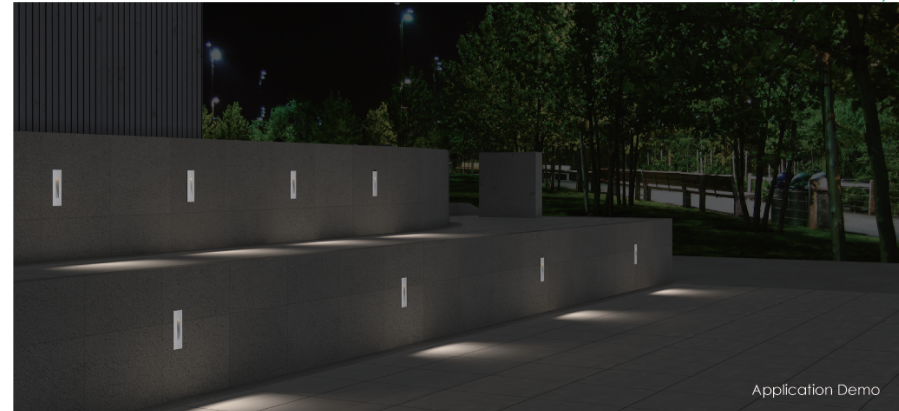


Application Demo

LED Colour Temperature

- 2000K
- 3000K
- 6000K


Optics



The above picture – the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.

Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.

Outer Dimensions

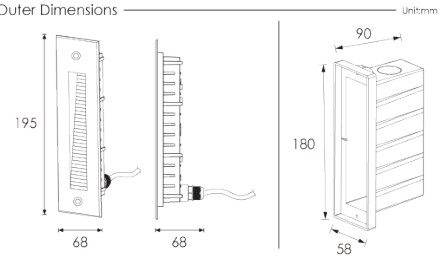

Mounting sleeve 076#

Material specifications

Housing	12" Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class I/ASTM class 4B
Front cover	12" Die-casting aluminum
Light Window	Tempered glass T=2mm
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C-40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 076#
Dimmable Support	Triac PWM 1-10V Dali

Item	Light Source	Lens	The manufacturer selected lens degree*(θ)1/2	Input voltage(V)	Typical operating current(I)(mA)	Typical consumption(W)	Typical luminance(lm)	IK Rate
B1FL0157	1X2W	B38	30°	24V DC 120V/240	2.4 V = 105 120V = 40 240V = 25	2.4 V = 2.5 120V = 2.7 240V = 2.8	Cool white =64 Warm white =55	10

