


Recessed  
LED Stair Light and Wall Light  
Stainless steel front cover with Matt Surface

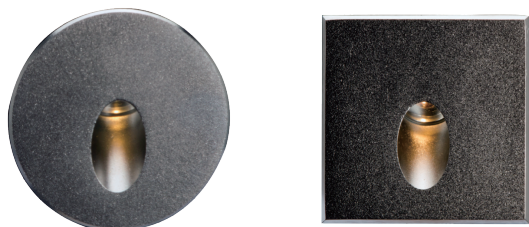

Application Demo


LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

- N/A

Outer Dimensions

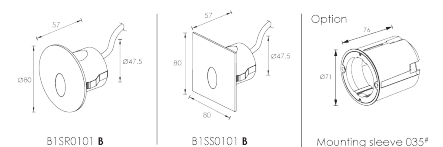


Material specifications

|                       |   |
|-----------------------|---|
| Housing               | Molding shaped stainless-steel SUS 316L   |
| Light Source          | OSRAM   |
| LED Driver            | Constant Voltage Input, Constant Current Output   |
| Operating temperature | -20°C~40°C  |
| Power Cable           | H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage)<br>H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage) |
| Mounting sleeve       | ABS 035#  |
| Dimmable Support      | Triac PWM 1-10V Dali  |

Beam effect demo



Wall recessed



Installation with clips embedded into sleeve, fix on the concrete wall



Installation with clips directly

| Item         | Light source | Lens        | The manufacturer selected lens degree(°)θ1/2 | Input voltage[V]   | Typical operating current(mA)      | Typical consumption(W)                   | Typical luminance(lm)          | IK rate |
|--------------|--------------|-------------|--|--------------------|------------------------------------|--|--------------------------------|---------|
| ○ B1SR0101 B | 1x1W         | L0180C010AR | 80°  | 24V DC<br>120V/240 | 24V = 59<br>120V = 26<br>240V = 16 | 24V = 1.46<br>120V = 1.70<br>240V = 1.70 | Cool white=51<br>Warm white=46 | 10      |
| □ B1SS0101 B | 1x1W         | L0180C010AR | 80°  | 24V DC<br>120V/240 | 24V = 59<br>120V = 26<br>240V = 16 | 24V = 1.46<br>120V = 1.70<br>240V = 1.70 | Cool white=51<br>Warm white=46 | 10      |

