


Recessed
LED Stair Light & Wall light

LED Colour Temperature Optics

- 2000K
- 3000K
- 6000K
- N/A

Outer Dimensions Unit:mm

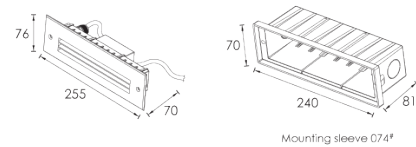


Material specifications

Housing & Front cover	12" Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Light Window	PC T=3mm
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 074*
Dimmable Support	Triac PWM 1-10V Dali


Front Cover Color Option

- Basic
Sanded Dark Grey
KAP 7037
- Secondary
Silver Resistant Paint
RAL 9006
- Sanded Black
RAL 9005

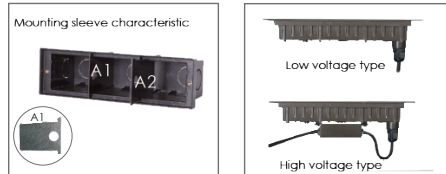

*The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
*Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1BB5407	54x5MD2835	24V DC 120/240	24V = 220 120V = 95 240V = 53	24V = 5.3 120V = 6.4 240V = 6.8	Cool white =47 Warm white =44	09

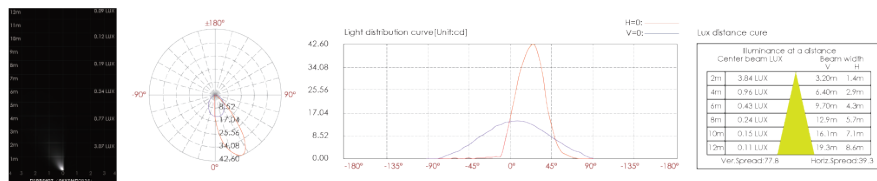


Recessed
LED Stair Light and Wall Light


LED Colour Temperature Optics

- 2000K
- 3000K
- 6000K

B38



Outer Dimensions Unit:mm

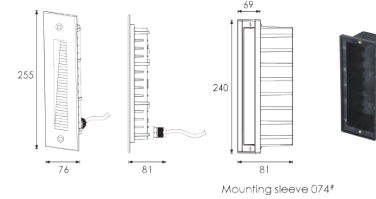


Material specifications

Housing	12" Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12" Die-casting aluminum
Light Window	Tempered glass T=2mm
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 074*
Dimmable Support	Triac PWM 1-10V Dali

Front Cover Color Option

- Basic
Sanded Dark Grey
KAP 7037
- Secondary
Silver Grey
KAP 9022
- Sanded Black
RAL 9005

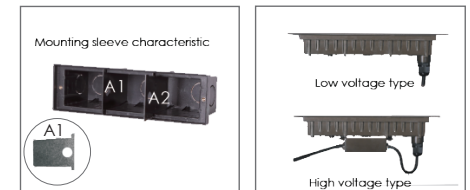

*The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
*Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

Item	Light Source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK Rate
B1BG0257	2X1.5W	B38	30°	24V DC 120/240	2.4 V=150 120V= 36 240V= 22	2.4 V=3.6 120V=3.8 240V=3.8	Cool white=106 Warm white= 94	10

