


Recessed
LED Stair Light and Wall Light
Stainless Steel Front Cover

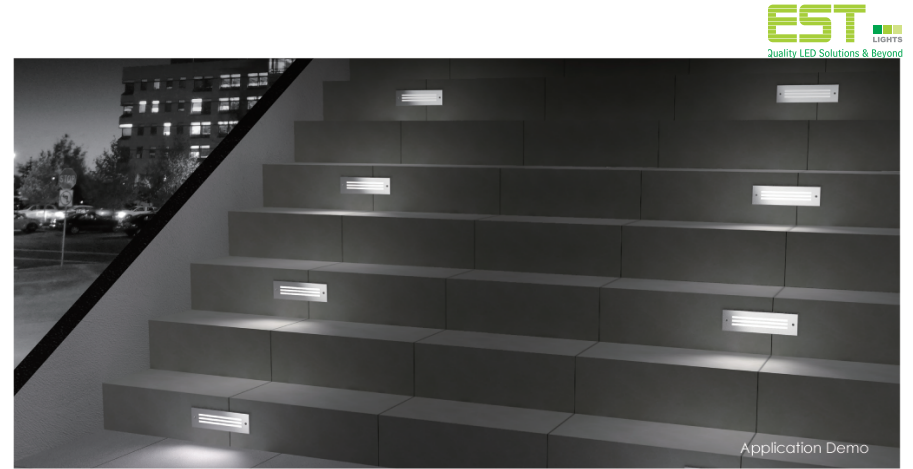

Application Demo


LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

- N/A


Outer Dimensions

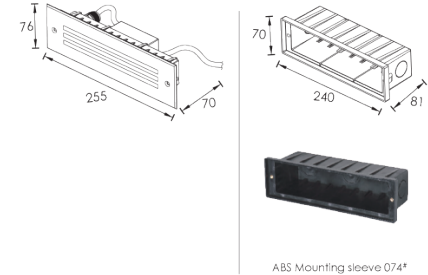


Material specifications

Housing	12° Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome plated Stainless steel 316*
Light Window	PC T=3mm
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage input, Constant Current Output
Operating temperature	-20°C - 40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 074*
Dimmable Support	Triac PWM 1-10V Dali


Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1BC5407	54*SMD 2835	24V DC 120/240	24V = 220 120V = 95 240V = 62	24V = 5.3 120V = 6.7 240V = 6.8	Cool white = 107 Warm white = 90	10

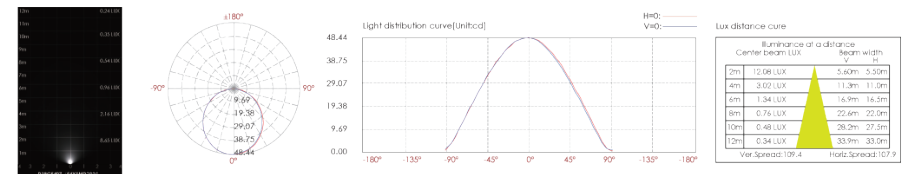


Mounting sleeve characteristics



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.



Low voltage type



High voltage type