

## Recessed LED Wall Light



Application Demo


### LED Colour Temperature

- 2000K
- 3000K
- 6000K

### Optics

- N/A

### Outer Dimensions

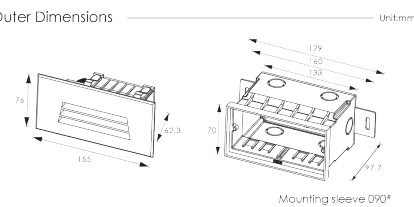

### Material specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12# Die-casting aluminum <b>RAL7037</b> powder coated T=60-80um, Adhesion of ISO class 1/ASTM class 4B
LED	<b>SMD3030</b> type LED
Cable gland	IP67 PG9 PA66
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C-40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage)
Mounting sleeve	ABS Ø90*
Dimmable Support	<b>Triac PWM 1-10V Dali</b>

### Front Cover Color Option



The clips have been specially modified and upgraded to have a stronger structure in order to make up the absence of the screw fixing.



There are two metal support plates on the bottom of the sleeve. It is used for fixing and preventing the mounting sleeve shifting while filling the concrete. These will simply installer and electrician while they are recessing the sleeves.

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
<b>D1CB1834</b>	18x0.3W	24V DC 120 / 240	24V = 235 120V = 97 240V = 54	24V = 5.5 120V = 6.8 240V = 6.9	Cool white =38 Warm white =34	09

