

Recessed  
LED Stair Light and Wall Light



LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

- N/A


Front Cover Color Option	
- Basic Sandcast Dark Grey KAP 7037	
- Secondary Silver Grey KAP 9022	
Sandcast Black RAL 9005	




The clips have been specially modified and upgraded to have a stronger structure in order to make up the absence of the screw fixing.



There are two metal support plates on the bottom of the sleeve. It is used for fixing and preventing the mounting sleeve shifting while filling the concrete. These will simply installer and electrician while they are recessing the sleeves.

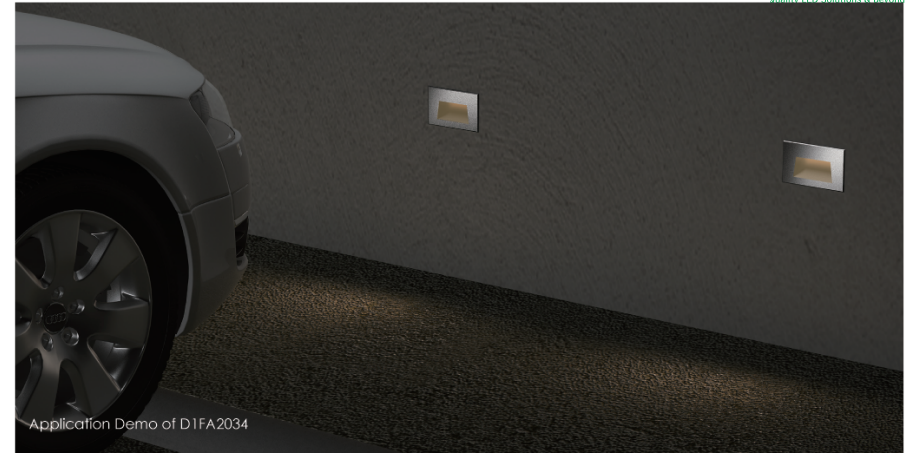

Outer Dimensions

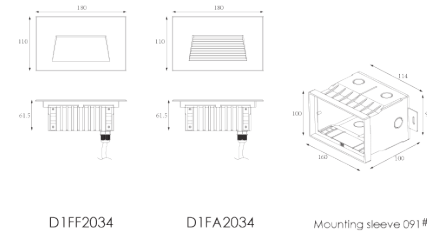

Material specifications

Housing	12# Die-casting grey powder coated aluminum, T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12# Die-casting aluminum <b>RAL7037</b> powder coated T=60-80um Adhesion of ISO class 1/ASTM class 4B;
LED	<b>SMD3030</b> type LED
Cable gland	IP-67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X 1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3X 1.0mm <sup>2</sup> L=0.5m (high voltage)
Mounting sleeve	ABS 091#
Dimmable Support	Trac <b>PWM 1-10V Dali</b>

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
<b>D1FA2034</b>	20x0.2W	24V DC 120/240	24V = 227	24V = 5.6	Cool white =103 Warm white =96.5	10
			120V = 102	120V = 6.8		
			240V = 57	240V = 6.8		
<b>D1FF2034</b>	20x0.2W	24V DC 120/240	24V = 227	24V = 5.6	Cool white =113.7 Warm white =104.3	10
			120V = 101	120V = 6.8		
			240V = 56	240V = 6.8		

