



Recessed LED Stair Light and Wall Light

LED Colour Temperature

- 2000K
- 3000K
- 6000K


Optics

- N/A



Outer Dimensions

Unit:mm

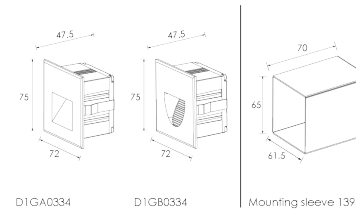

D1GA0334

D1GB0334

Mounting sleeve 139°

Material specifications

Housing	12# Die-casting aluminum T=20-25um,Adhesion of ISO class 1 / ASTM class 4B high temperature painting
Light Source	SMD3030 Type LED
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	139# Zinc plated mounting sleeve grey powder Coated,T=60-80um,Adhesion of ISO class 1/ASTM class 4B
Dimmable Support	Triac PWM 1-10V Dali

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1GA0334	3x0.7W	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.1 240V = 3.1	Cool white =26 Warm white =24	10
D1GB0334	3x0.7W	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.0 240V = 3.1	Cool white =25 Warm white =22	10

