

Landscape Spot Light



LED Colour Temperature

2000K
3000K
6000K

Optics

B14

L0130D050KP 30°

L0145D050KP 45°

B14




30°




45°

Outer Dimensions


Unit:mm



Adjustable beam direction



New






Material Specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80μm,Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass,T=4mm
LED Driver	Constant Voltage Input,Constant Current Output
LED	OSRAM
Lens	Optical lens,efficiency≥85%
Power Cable	H05RN-F 2X1.0mm ² L=2.0m(low voltage) H05RN-F 3X1.0mm ² L=2.0m(high voltage)
Operating temperature	-20°C~40°C
Mounting base	Powder coated die-casting aluminum
Dimmable Support	Triac PWM 1-10V Dali

Housing Color Option

Basic	Secondary	
Sanded Dark Grey KAP 7037	Silver Grey KAP 9022	Sanded Black RAL9005

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B3XBM0127	1×8W COB	B14	30°	24VDC 120/240	24V = 411 120V = 88 240V = 50	24V = 9.8 120V = 10.8 240V = 10.8	Cool white =761 Warm white =696	07

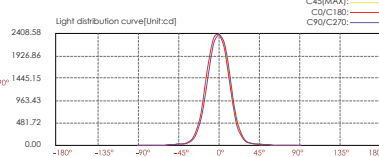

Lux distance cure

Luminance at a distance		
Center beam LUX	Beam width V	H
2m 598.47 LUX	1.0m	1.0m
4m 149.62 LUX	2.0m	2.0m
6m 66.30 LUX	3.0m	3.1m
8m 37.40 LUX	4.0m	4.1m
10m 23.94 LUX	4.9m	5.1m
12m 16.62 LUX	5.9m	6.1m
Ver.Spread:27.8 Horiz.Spread:28.6		