

Asymmetrical Wall Mounting Wall Washer



LED Colour Temperature

2000K
3000K
6000K

Optics




C9



45°
35°


Outer Dimensions

Unit:mm

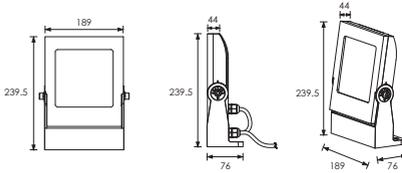

Material Specifications

Housing	12# Die-casting powder coated aluminum . T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Bracket	Powder coated aluminum
Light Window	Tempered glass, T=4mm
Reflector	Optical Reflector efficiency≥90%
LED	OSRAM or NICHIA
Cable gland	IP68 PG-9 PA66
Gasket	Tooling shaped seal
Power cable	24V: H05RN-F 2×1.0mm ² L=2M(Single) 100/240V: H05RN-F 3×1.0mm ² L=2M(Single)
Dimmable Support	Triac PWM 1-10V Dali

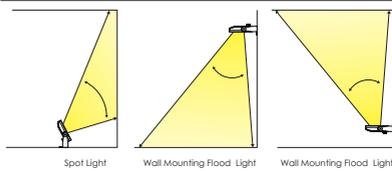

Housing Color Option

Basic	Secondary	
Sanded Dark Grey KAP 7037	Silver Grey KAP 9022	Sanded Black RAL9005

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
C3PFM1257 U	12×1.5W	C9	45° 35°	24V DC 120/240	2.4 V = 1050 120V = 143 240V = 79	2.4 V = 25.0 120V = 18.0 240V = 18.0	Cool white =1355 Warm white =1206	08

