

Strong up light Small Size LED Inground Light



LED Colour Temperature

2000K
3000K
6000K

Optics



B33(B33D/B33F)
L0109F023YH 9°
L0115D023YH 15°
L0120D023YH 20°
L0130D023YH 30°
L0145D023YH 45°


B33(B33D/B33F)



9°(B33F) 15° 20° 30° 45°

Outer Dimensions


Unit:mm

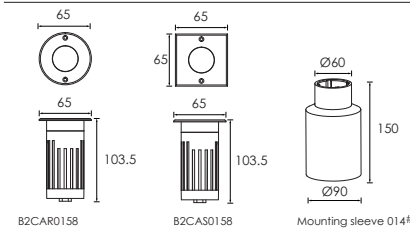

Material Specifications

Housing	12" Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome plated stainless steel SUS 316"
Light Window	Tempered frosted step glass, T=5mm
LED	NICHIA
Glass pressure capacity	Full area=783kgs
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage) H05RN-F 3X1.0mm² L=0.5m(high voltage)
Mounting sleeve	ABS Ø14"
Dimmable Support	Triac PWM 1-10V Dali

Optional Honeycomb Louver

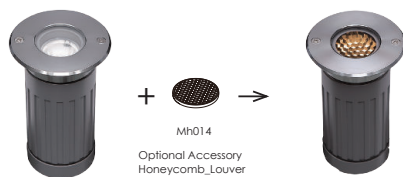

Optional Accessory
Honeycomb_Louver

