




Up light Tiny Type LED Inground Light Stainless Steel Front Cover

LED Colour Temperature

2000K
3000K
6000K

Optics



B26



8°

B27




13° 25° 30°




Outer Dimensions

Unit:mm



B2YC0157






Mounting sleeve 033#

Material Specifications

Housing	12# Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel SUS 316L#
Light Window	Tempered frosted step glass,T=4mm
LED	OSRAM
Glass pressure capacity	Full area=254kgs
Operating temperature	-20°C-40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m(low voltage)
Mounting sleeve	ABS 033#
Dimmable Support	Triac PWM 1-10V Dali

Item	Light source	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ B2YC0157	1×2.0W OSRAM	25°	24V DC	110	2.5	Cool white =135 Warm white =120	03

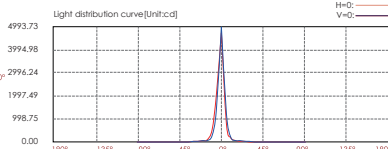

Ver Spread:27.8 Horiz.Spread:26.7

Beam width	Center beam LUX	Beam width	Center beam LUX
2m	130.94 LUX	1.0m	0.9m
4m	32.73 LUX	2.0m	1.9m
6m	14.55 LUX	3.0m	2.8m
8m	8.18 LUX	4.0m	3.8m
10m	5.24 LUX	5.0m	4.7m
12m	3.64 LUX	5.9m	5.7m