



## Soft Beam Type Mini LED Inground Light

LED Colour Temperature


2000K  
3000K  
6000K

Optics

N/A



### Outer Dimensions

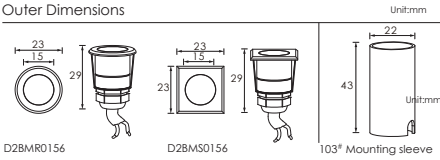

### Material Specifications

Housing	Aluminum anodized finishing or powder painting
Front ring	Hard chromeplated stainless steel SUS 316 <sup>†</sup>
PMMA	T=2mm
Cable gland	IP67 Nickel coated copper
Gasket	Silicone seal
LED Driver	Constant Current Input
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X0.5mm <sup>2</sup> L=0.3m
Mounting sleeve	ABS 103°
Dimmable support	<b>Triac PWM 1-10V Dali</b>

Item	Light source	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ <b>D2BMR0156</b>	1×1W	120°	3V DC	350	1	Cool white =66 Warm white =58	02
□ <b>D2BMS0156</b>	1×1W	120°	3V DC	350	1	Cool white =66 Warm white =58	02

