




Diffuser Tiny Type LED Inground Light Stainless Steel Front Cover

LED Colour Temperature	Optics
2000K 3000K 6000K	N/A



Outer Dimensions

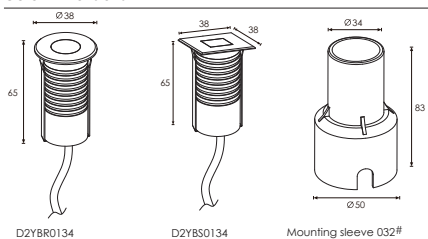

Material Specifications

Housing	12" Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel SUS 316L*
Light Window	Tempered frosted step glass, T=4mm
LED	OSRAM or NICHIA
Glass pressure capacity	Full area=254kgs
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m[low voltage]
Mounting sleeve	ABS 032#
Dimmable Support	Triac PWM 1-10V Dali

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ D2YBR0134	1×0.5W NICHIA	24V DC	26	0.6	Cool white=11.0 Warm white=9.60	03
□ D2YBS0134	1×0.5W NICHIA	24V DC	26	0.6	Cool white=11.0 Warm white=9.60	03

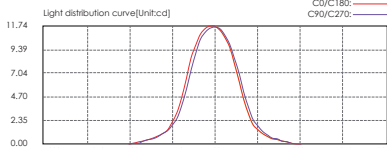

Lux distance cure

Center beam LUX	Beam width V	H
2m	2.93 LUX	2.20m 2.20m
4m	0.73 LUX	4.40m 4.40m
6m	0.33 LUX	6.60m 6.60m
8m	0.18 LUX	8.80m 8.80m
10m	0.12 LUX	10.9m 11.0m
12m	0.08 LUX	13.1m 13.2m

Vert.Spread:57.4 Horiz.Spread:57.4