


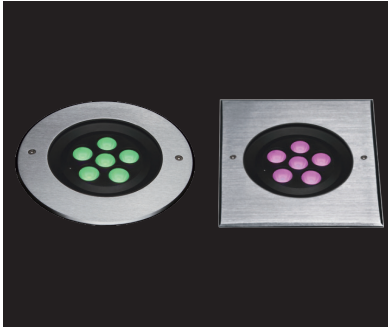

Symmetrical LED Up Light/Inground Light

LED Colour Temperature

2000K
3000K
6000K

Optics



FB06	
F06B33F09	9°
F06B33D15	15°
F06B33D20	20°
F06B33D30	30°
F06B33D45	45°


FB06



9° 15° 20° 30° 45°

Outer Dimensions

Unit:mm

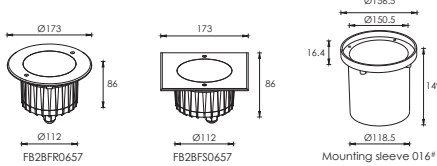


Material Specifications

Housing	12° Die-casting grey powder coated aluminum. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front ring	Hard chrome plated stainless steel SUS 316L°
Light Window	Tempered frosted step glass,T=8mm
Glass pressure capacity	Full area=2274kgs
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped silicone seal
LED	OSRAM
Lens	Optical lens,efficiency≥85%
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~+40°C
Power Cable	H07RN-F 2X1.0mm² L=0.5m (low voltage) H07RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 016°
Dimmable Support	Triac PWM 1-10V Dali

Optional Honeycomb Louver

Product Overview

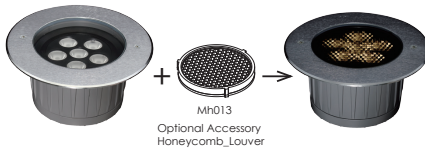

Impression drawing of lens FB06



Item	Light source	Lens	The manufacturer selected lens degree(°)1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ FB2BFR0657	6×2W	FB06	20°	24V DC 120/240	2 4 V = 562 120V = 100 240V = 56	2 4 V = 13.5 120V = 11.8 240V = 12.4	Cool white =956 Warm white =783	07
□ FB2BFS0657	6×2W	FB06	20°	24V DC 120/240	2 4 V = 562 120V = 100 240V = 56	2 4 V = 13.5 120V = 11.8 240V = 12.4	Cool white =956 Warm white =783	07

