


Depth Illuminant Series

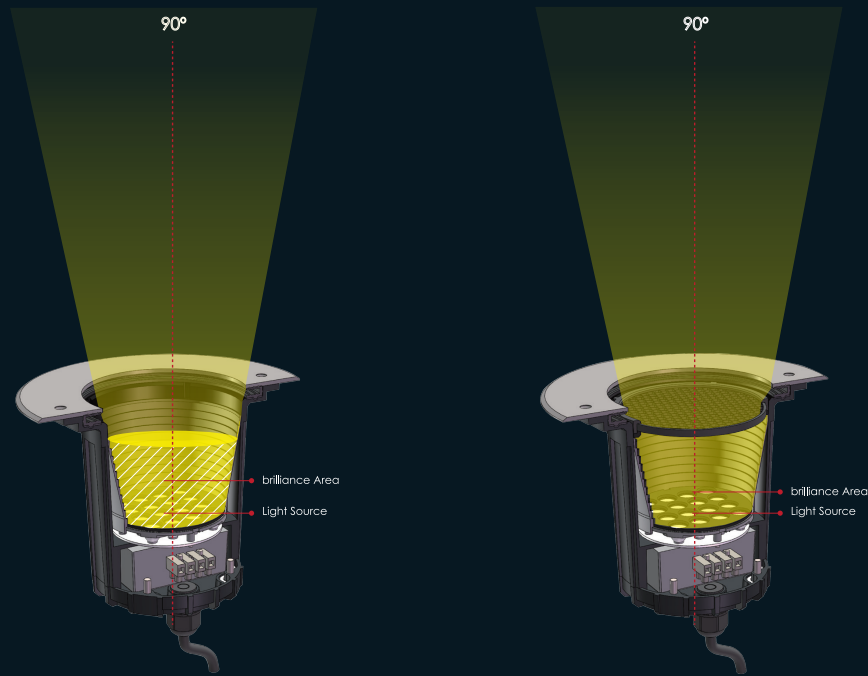

Depth Illuminant LED Inground Light


LED Colour Temperature

2000K
3000K
6000K


Optics

B33(B33D/B33F)
L0109F023YH 9°
L0115D023YH 15°
L0120D023YH 20°
L0130D023YH 30°
L0145D023YH 45°

B33D




B33F

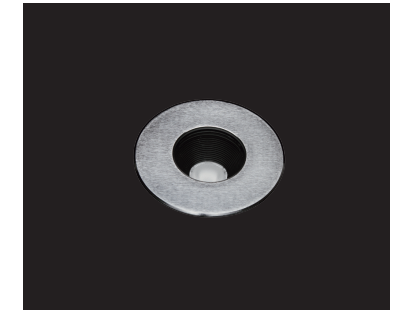

Outer Dimensions

Unit:mm




Material Specifications

Housing	12# die-casting grey powder coated aluminum . T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome plated stainless steel SUS 316L# Glass Step tempered glass.T=6mm
Reflector	Optical Reflector efficiency≥90%
LED	Oslam SMD3030
Glass pressure capacity	Full Area=1195kgs
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm L=0.5m (high voltage)
Mounting sleeve	ABS
Dimmable support	Triac PWM 1-10V Dali

Optional Honeycomb Louver

Product Overview

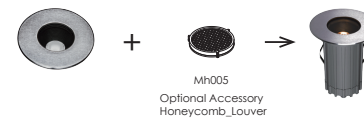

Item	Light source	Reflector	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK
○ GB2CFR0158	1×4.0W	B33D	20°	24V DC 120/240	24V = 131	24V = 3.10	Cool white =230 Warm white =200	09
□ GB2CFS0158					120V = 36 240V = 22	120V = 4.30 240V = 4.10		

