



Depth Illuminant LED Inground Light

LED Colour Temperature


2000K
3000K
6000K

Optics




B15
L0110D016LK 10°
L0115D016LK 15°
L0120D016LK 20°
L0130D016LK 30°

B15



Outer Dimensions

Unit:mm




Material Specifications

Housing	12# die-casting grey powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated stainless steel SUS 316L#
Glass	Step tempered glass.T=8mm
Reflector	Optical Reflector efficiency=90%
LED	Osram SMD3030
Glass pressure capacity	Full Area=2500kgs
Cable gland	IP68 PG-11 PA66
Gasket	Molding shaped seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power cable	H05RN-F 2X1.0mm2 L=0.5m (low voltage) H05RN-F 3X1.0mm L=0.5m (high voltage)
Mounting sleeve	ABS
Dimmable support	Triac PWM 1-10V Dali

Optional Honeycomb Louver

Product Overview

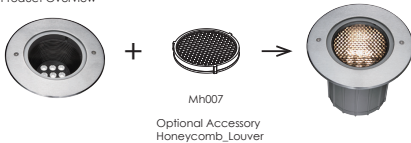

Item	Light source	Reflector	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK
○ GB2EFR0956	9×1.2W	B15	20°	24V DC 120/240	24V = 521	24V = 12.5	Cool white =1003 Warm white = 790	10
□ GB2EFS0956					120V = 122 240V = 64	120V = 13.2 240V = 13.2		

