



## Depth Illuminant LED Inground Light


### LED Colour Temperature

2000K  
3000K  
6000K

### Optics


	<b>B15</b>
	L0110D01 6LK 10°
	L0115D01 6LK 15°
	L0120D01 6LK 20°
	L0130D01 6LK 30°

### B15



### Outer Dimensions

Unit:mm




### Material Specifications

Housing	12# die-casting grey powder coated aluminum . T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome plated stainless steel SUS 316L#
Glass	Step tempered glass.T=10mm
Reflector	Optical Reflector efficiency≥90%
LED	Osram SMD3030
Glass pressure capacity	Full Area=2961kgs
Cable gland	IP68 PG-11 PA66
Gasket	Molding shaped seal
LED Driver	Constant Voltage Input.Constant Current Output
Operating temperature	-20°C~40°C
Power cable	H07RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage) H07RN-F 3X1.0mm L=0.5m (high voltage)
Mounting sleeve	ABS
Dimmable support	Triac PWM 1-10V Dali




### Optional Honeycomb Louver

#### Product Overview

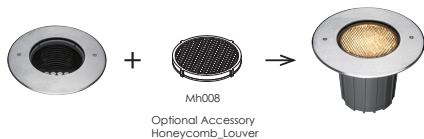

Mh008  
Optional Accessory  
Honeycomb\_Louver

Item	Light source	Reflector	The manufacturer selected lens degree(°)β1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK
○ GB2FFR1656	16x1.2W	B15	20°	24V DC 120/240	24V = 830 120V = 166 240V = 84	24V = 20 120V = 19 240V = 18.5	Cool white =1215 Warm white =1155	10
□ GB2FFS1656								

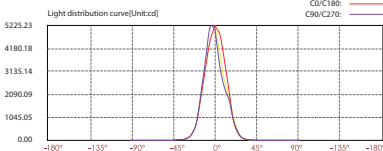

Beam distance (m)	Center beam ILLUX	Beam width (m)
2m	1300.10 LUX	0.6m 0.6m
4m	325.03 LUX	1.6m 1.7m
6m	144.46 LUX	2.4m 2.6m
8m	81.26 LUX	3.2m 3.5m
10m	52.00 LUX	4.0m 4.4m
12m	36.11 LUX	4.8m 5.2m