



Adjustable Beam Direction LED Inground Light


LED Colour Temperature

2000K
3000K
6000K

Optics


B17
L0115D017ME 15°
L0120D017ME 20°
L0130D017ME 30°
L0150D017ME 50°

B26
L0108C021YT 8°



Outer Dimensions

Unit:mm



Material Specifications




Housing	12# die-casting grey powder coated aluminum T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated stainless steel SUS 316L.#
Glass	Step tempered white coating glass,T=8mm
Glass pressure capacity	Full Area=2526kgs
Cable gland	IP68 PG-11 PA66
Gasket	Molding shaped seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power cable	H07RN-F 2X1.0mm² L=0.5m (low voltage) H07RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS Housing with diran base
Dimmable Support	Triac PWM 1-10V Dali

Optional Honeycomb Louver

Product Overview



Item	Light source	Reflector	The manufacturer selected lens degree*(°)1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK
○XB2DFR0257	2x1.5W	B17	20°	24V DC 120/240	24V = 150 120V = 36 240V = 24	24V = 3.6 120V = 3.8 240V = 3.8	Cool white =250 Warm white =190	09
□XB2DFS0257								

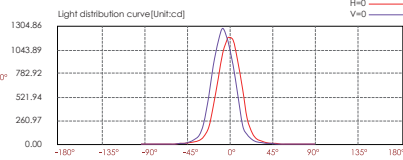

Lux distance cure

Center beam LUX	Beam width V	H
2m 284.40 LUX	1.0m	1.0m
4m 71.10 LUX	1.9m	2.0m
6m 31.40 LUX	2.9m	2.9m
8m 17.78 LUX	3.9m	3.9m
10m 11.38 LUX	4.8m	4.9m
12m 7.90 LUX	5.8m	5.9m

Var.Spread:27.1 Horiz.Spread:27.4