TRIAC PWM 1-10V DALI IP67 RoHS CE 1704kgs ETL

EST LIGHTS
Quality LED Solutions & Beyond

Asymmetrical
Power LED Inground Light

LED Colour Temperature

2000K
3000K
6000K

Optics

C9
L01 45° / 35° F023YH

C9

45°
35°

Outer Dimensions

Unit:mm



Mounting sleeve 011#

Material Specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80μm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated stainless steel SUS 316#
Light Window	Tempered frosted step glass.T=7mm
LED	OSRAM
Glass pressure capacity	Full area=1704kgs
Gasket	Molding shaped silicone seal
Lens	Optical lens.efficiency≥85%
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage) H05RN-F 3X1.0mm² L=0.5m(high voltage)
Mounting sleeve	ABS 011#
Dimmable Support	**Triac PWM 1-10V Dali**




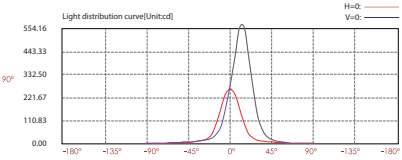
Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
◯ **C2WDR0157 A**	1×2W	C9	45° / 35°	24V DC 120/240	24 V = 105 120V = 47 240V = 28	24 V = 2.5 120V = 3.0 240V = 3.1	Cool white =158 Warm white =130	08