

High Power LED Garden Light



FB3DM0357



FB3DB0357

LED Colour Temperature


2000K
3000K
6000K

Optics




FB03
F038.33D09 9°
F038.33D15 15°
F038.33D20 20°
F038.33D30 30°
F038.33D45 45°

FB03




Housing Color Option

<p>Basic</p> <p>Sanded Dark Grey KAP 7037</p>	<p>Secondary</p> <p>Silver Grey KAP 9022</p> <p>Sanded Black RAL9005</p>
---	--

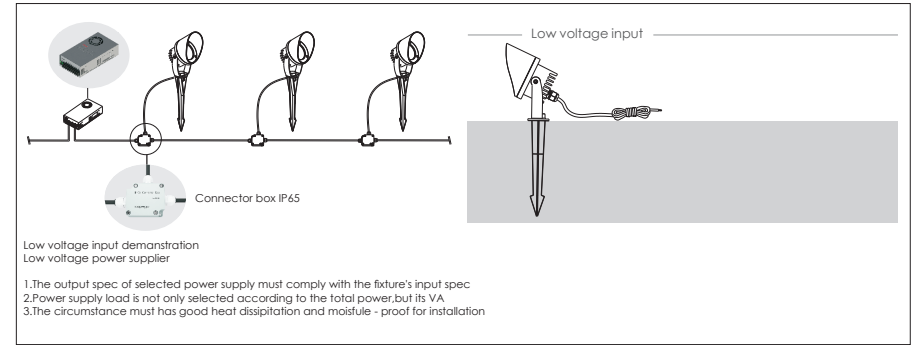

Outer Dimensions

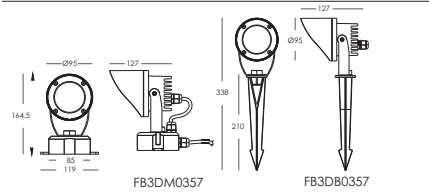

Material Specifications

Housing	12# Die-casting dark grey powder coated aluminum . I=60-80µm Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass, T=4mm
Cable gland	IP68 PG-9 PA66
LED Driver	Constant current output 600 mA
LED	OSRAM or NICHIA
Operating temperature	-20°C~ 30°C
Power cable	H05RN-F 2X1.0mm² L=2m (low voltage) H05RN-F 3X1.0mm² L=2m (high voltage)
Spike	ABS Spike 5d
Dimmable Support	Trac PWM 1-10V Dali

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
FB3DM0357	3*2W OSRAM	FB03	15°	24V DC	225	24V = 5.4	Cool white =415 Warm white =393	07
FB3DB0357	3*2W OSRAM	FB03	15°	24V DC	225	24V = 5.4	Cool white =415 Warm white =393	07

