

Underwater LED Spot Light



LED Colour Temperature


2000K
3000K
6000K

Optics



B32
L0120F024PS 20°
L0125F024PS 25°
L0130F024PS 30°
L0135F024PS 35°
L0145F024PS 45°

B32



Tripod-Optional Accessory




Bracket



Back View

Outer Dimensions

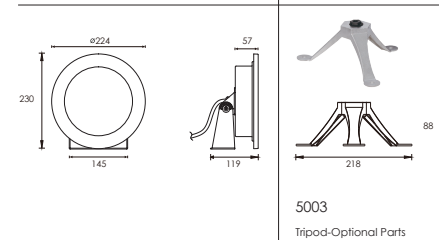

Warning:
Must be installed under the water to prevent the light from burning up because of over-heating.

Material Specifications

Front cover & Housing	Hard chromeplated molding shaped stainless steel SUS 316L
Light Window	Step tempered glass.T=10mm
Gasket	EPDM gasket
Lens	Optical lens,efficiency≥85%
Cable gland	IP68 PG-11 copper with nickel-coated
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity≥2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 2X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C~40°C less than 1 meter depth.
Built-in Overheat Sensor System	Automatic Shutdown at 75°C
Dimmable Support	Triac PWM 1-10V Dali

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B5FA1857	18*2W	B32	35°	24V DC	1900	45.6	Cool white=2221 Warm white=1828	10

