




LED Colour Temperature

2000K
3000K
6000K

Optics




C11




45°
35°

Outer Dimensions

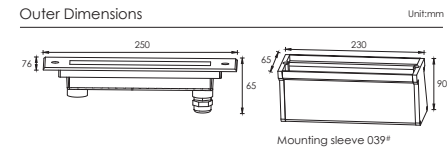

Material Specifications

Front cover & Housing	Hard chromeplated molding shaped stainless steel SUS 316#
Front plate	Hard chromeplated stainless steel SUS 316L#
Light Window	Step tempered glass.T=9mm
Gasket	Silicone Gasket
Lens	Asymmetrical optical lens,efficiency>85%
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity>2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 2X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C~40°C less than 1 meter depth.
Built-in Overheat Sensor System	Automatic Shutdown at 75°C
Cable gland	IP68 PG-11 copper with nickel-coated
Mounting sleeve	ABS 039#
Dimmable Support	Triac PWM 1-10V Dali

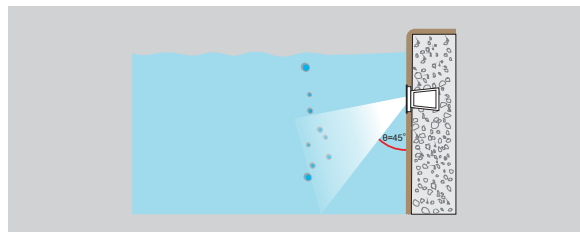

Water must be allowed to go inside and outside sleeve freely without leaking to the other side.

Warning:
Must be installed under the water to prevent the light from being burnt off because of over-heating.

Item	Light source	Lens	The manufacturer selected lens degree(°)@1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
C4TL0657	6×2W	C11	45° 35°	24V DC	500	12	Cool white=757 Warm white=656	08

