TRIAC PWM 1-10V DALI IP65 RoHS CE

EST LIGHTS
Quality LED Solutions & Beyond

Bollard Light

LED Colour Temperature

3000K
6000K

Optics

N/A

LED and Driver Module

Optional Base

1. Standard/Built-in Base
   SB00130

2. Flange Base
   FB00130

Flange base is an optional part which you need to remove the standard base before the assembling.

Outer Dimention

Unit:mm

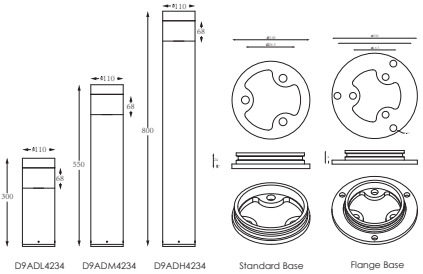

Housing Color Option

Basic	Secondary	
Sanded Black RAL9005	Light Sanded Grey RAL7038	Dark Grey RAL7037

Material Specifications

Housing	T=60-80um Adhesion of ISO class 1/ASTM class 4B 12° Die-casting powder coated aluminum.
Light window	PMMA
LED	SMD3030 type LED
LED Driver	Constant Voltage Input Constant Current Output
Operating temperature	-20°C~40°C
Power cable	H05RN-F 3×1.0mm² L=0.3m(high voltage/short) H05RN-F 3×1.0mm² L=0.5m(high voltage/medium) H05RN-F 3×1.0mm² L=1.0m(high voltage/high)
Base	Standard Base Flange base
Dimmable Support	**Triac PWM 1-10V Dali**

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)
D9ADL4234 D9ADM4234 D9ADH4234	42 X 0.2W	120/240	120V = 76 240V = 41	120V = 8 6 240V = 9 0	Warm white=586





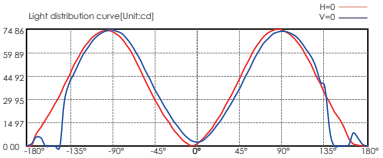

Lux distance cure