

COB LED Inground Light



LED Colour Temperature

2000K
3000K
6000K

Optics



R7
R0118C035XL 18°
R0124C035XL 24°
R0132C035XL 32°


R7



18° 24° 32°

Optional Honeycomb Louver

Product Overview

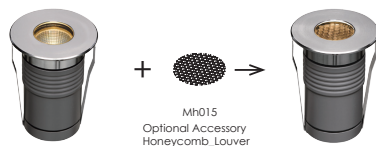


Mh015
Optional Accessory
Honeycomb Louver



Outer Dimensions

Unit:mm

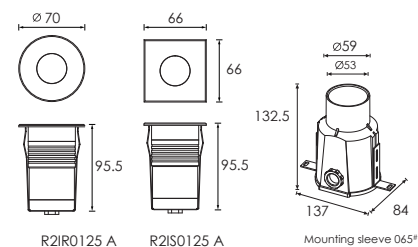

Material Specifications

Housing	12" Die-casting dark grey powder coated aluminum T=60-80μm;Adhesion of ISO class 1/ASTM class 4B
Front ring	Hard chromeplated stainless steel SUS 316*
Light Window	Tempered frosted step glass.T=7mm
Reflector	Optical Reflector efficiency≥90%
LED	NICHIA COB
Glass pressure capacity	Full area=783kgs
Cable gland	IP67 Copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20℃~40℃
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage) H05RN-F 3X1.0mm² L=0.5m(high voltage)
Mounting stee	ABS 065°

Item	Light source	Reflector	The manufacturer selected lens degree(°)91/2	Input voltage(V)	Typical operating current (mA)	Typical consumption(W)	Typical luminance(lm)	IK rating
 R21R0125 A	1×5W COB	R7	24°	24V DC 120/240	24V = 265 120V = 52 240V = 32	24V = 6.3 120V = 6.5 240V = 6.7	Cool white =506 Warm white =442	08
 R21S0125 A	1×5W COB	R7	24°	24V DC 120/240	24V = 265 120V = 52 240V = 32	24V = 6.3 120V = 6.5 240V = 6.7	Cool white =506 Warm white =442	08

