

High Power LED Garden Light



FB3DM0357



FB3DB0357


LED Colour Temperature	Optics
2000K	FB03
3000K	F03833D09 9°
6000K	F03833D15 15°
	F03833D20 20°
	F03833D30 30°
	F03833D45 45°




FB03
9°
15°
20°
30°
45°

Housing Color Option

Basic	Secondary
Sanded Dark Grey KAP 7037	Silver Grey KAP 9022
	Sanded Black RAL9005

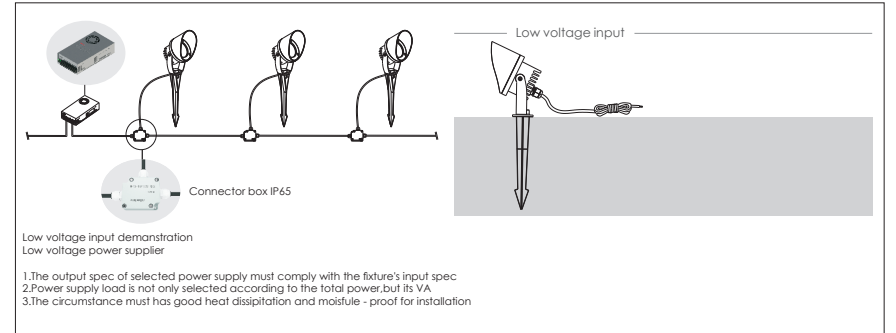

Outer Dimensions

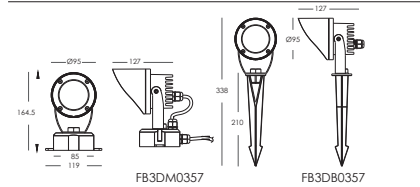

Material Specifications

Housing	12# Die-casting dark grey powder coated aluminum . T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass. T=4mm
Cable gland	IP68 PG-9 PA66
LED Driver	Constant current output 600 mA
LED	OSRAM or NICHIA
Operating temperature	-20°C~ 30°C
Power cable	H05RN-F 2X1.0mm² L=2m (low voltage) H05RN-F 3X1.0mm² L=2m (high voltage)
Spike	ABS Spike 5d
Dimmable Support	Triac PWM 1-10V Dali

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage[V]	Typical operating current[mA]	Typical consumption[W]	Typical luminance[lm]	IK rate
FB3DM0357	3×2W OSRAM	FB03	15°	24V DC	225	24V = 5.4	Cool white =415 Warm white =393	07
FB3DB0357	3×2W OSRAM	FB03	15°	24V DC	225	24V = 5.4	Cool white =415 Warm white =393	07

