

COB LED Garden Light



R3DM0126



R3DB0126

LED Colour Temperature


3000K
6000K

Optics



R5
R0118C044XL 18°
R0125C044XL 25°
R0140C044XL 40°


R5




18° 25° 40°

Housing color Option

Basic	Secondary	
Sanded Dark Grey KAP 7037	Silver Grey KAP 9022	Sanded Black RAL9005

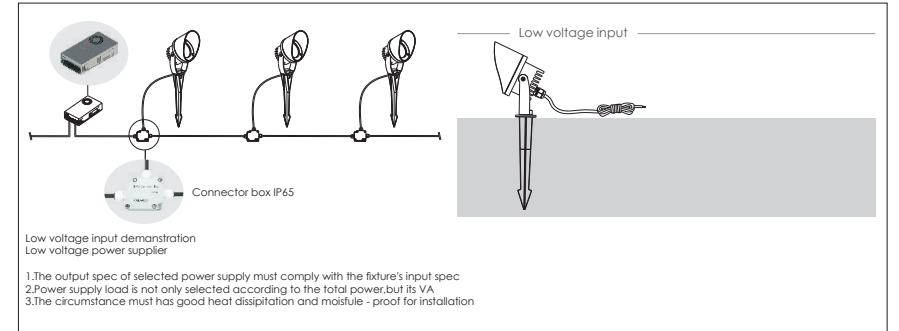

Outer Dimensions

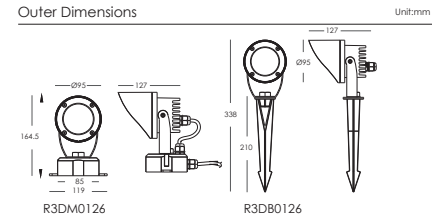

Material Specifications

Housing	12# Die-casting dark grey powder coated aluminum . T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass, T=4mm
LED	NICHIA
Cable gland	IP68 PG-9 PA66
LED Driver	Constant current output 600 mA
Operating temperature	-20°C~ 30°C
Power cable	H05RN-F 2X1.0mm2 L=2m
Spike	ABS Spike 5d

Item	Light source	Reflector	The manufacturer selected lens degree(°)101/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
R3DM0126	1×6W	R5	25°	24VDC	270	6.5	Cool white =646 Warm white =576	07
R3DB0126	1×6W	R5	25°	24VDC	270	6.5	Cool white =646 Warm white =576	07

