

Beam Direction Adjustable Inground Light



LED Colour Temperature


2000K
3000K
6000K

Optics




B15
L0110D014LK 10°
L0115D014LK 15°
L0120D014LK 20°
L0130D014LK 30°

B15



Outer Dimensions



Mounting sleeve Ø73*



Unit:mm

Material Specifications

Housing	12" Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel SUS 316L*
Light Window	Tempered frosted step glass, T=6mm
Lens	Optical lens efficiency ≥85%
LED	OSRAM
Glass pressure capacity	Full area=1226kgs
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage) H05RN-F 3X1.0mm² L=0.5m(high voltage)
Mounting sleeve	ABS Ø73*
Dimmable Support	Triac PWM 1-10V Dali

Optional Honeycomb Louver

Product Overview

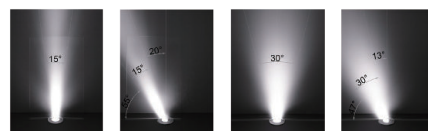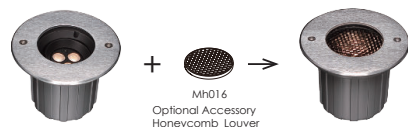

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
XB2FT0356	3×1W	B15	20°	24V DC 120/240	2.4 V = 131 120V = 54 240V = 30	2.4 V = 3.1 120V = 3.8 240V = 3.8	Cool white =320 Warm white =294	09

