


# Recessed RGBW LED strip inground light




## OPTICS



## OUTER DIMENSIONS & ACCESSORIES

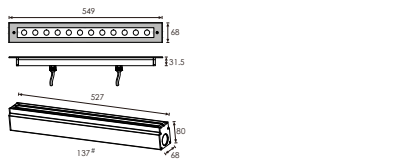

Mounting Sleeve137# B2RLB1219

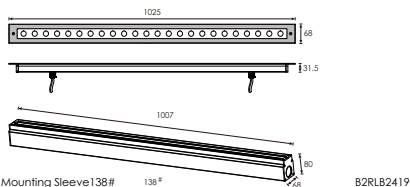

Mounting Sleeve138# B2RLB2419

## LED WAVE LENGTH

• R = 620-630 nm • G = 520-530 nm • B = 460-470 nm  
• W = 6000K

## MATERIAL SPECIFICATIONS

- HOUSING** | Extruded aluminum, powder coated
- FRONT COVER** | Hard chromeplated stainless steel SUS 316L
- LIGHT WINDOW** | Tempered glass,T=6mm
- LED** | SMD3535 4 IN 1 LED
- LENS** | Optical lens,efficiency>85%
- CABLE GLAND** | IP68 PG-9 PA66
- GASKET** | Glass and housing are silicone sealed
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RR-F 5x0.75mm<sup>2</sup> L=0.5m
- MOUNTING SLEEVE** | Powder Coated Aluminum 138#

## TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENGTH(MM)	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
<b>B2RLB1219</b>	12x2W RGBW 4in1 Full Color	B48	549	30°	24V DC	1020	24.5	1114	07
<b>B2RLB2419</b>	24x2W RGBW 4in1 Full Color	B48	1025	30°	24V DC	2008	48.2	2162	07

## PHOTOMETRIC CURVES

