


DRYWALL LED PROFILES









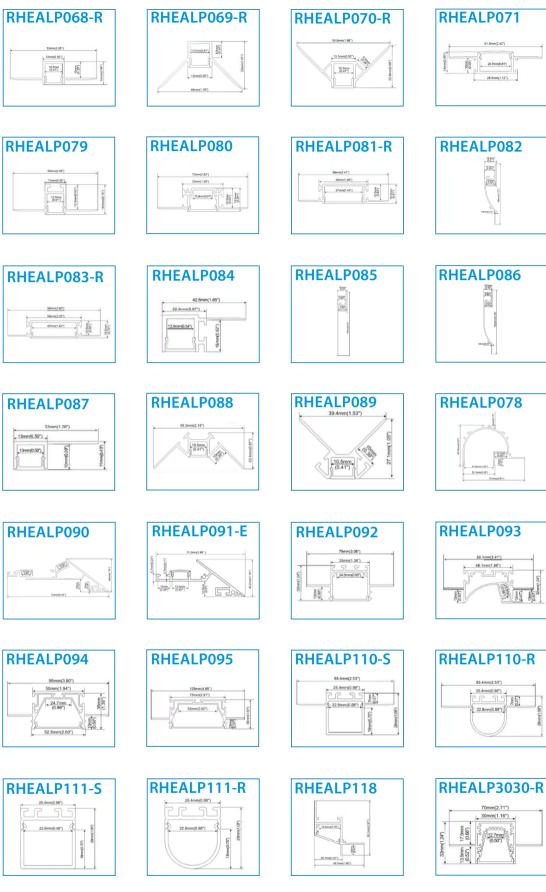

20.7mm(0.81")

28.5mm(1.12*)

15.5mm (0.807)

(20m)

(22 Dunie)

Lamma ar A

-fee

47.0mm(1.07)


48.1mm(1.86")

25.4mm(0.98")


30mm(1.16") 12.7mm

13mm (0.507)


transfer of the second second











RHEA	LD4	242
RHEA	LD42	242E
1	1220	6
1		8










RHEALD5015C 14. 12.3 17.1 50.




















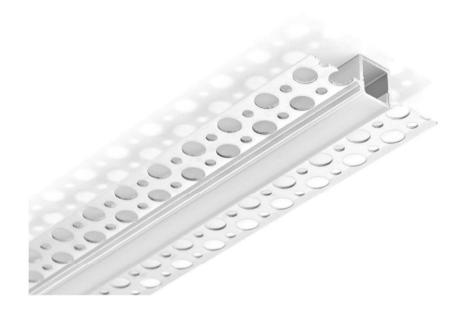


RHEALP068-R



End cap with hole End cap without hole

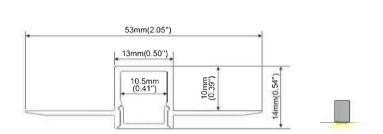


PC Diffused cover

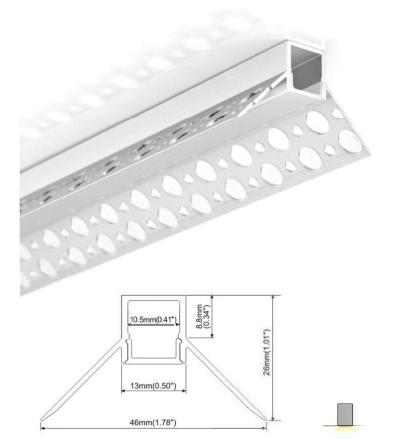


RHEALP069-R




End cap with hole End cap without hole

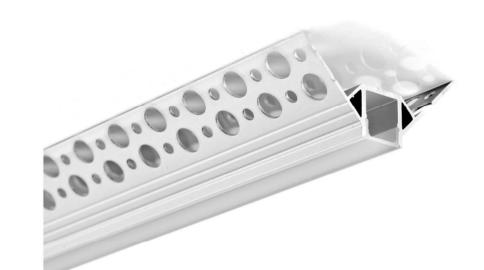







PC Diffused cover



RHEALP070-R



End cap with hole End cap without hole


PC Diffused cover





End cap with hole End cap without hole

PMMA Opal matte cover PMMA Semi-clear cover PMMA Clear cover PC Diffused cover

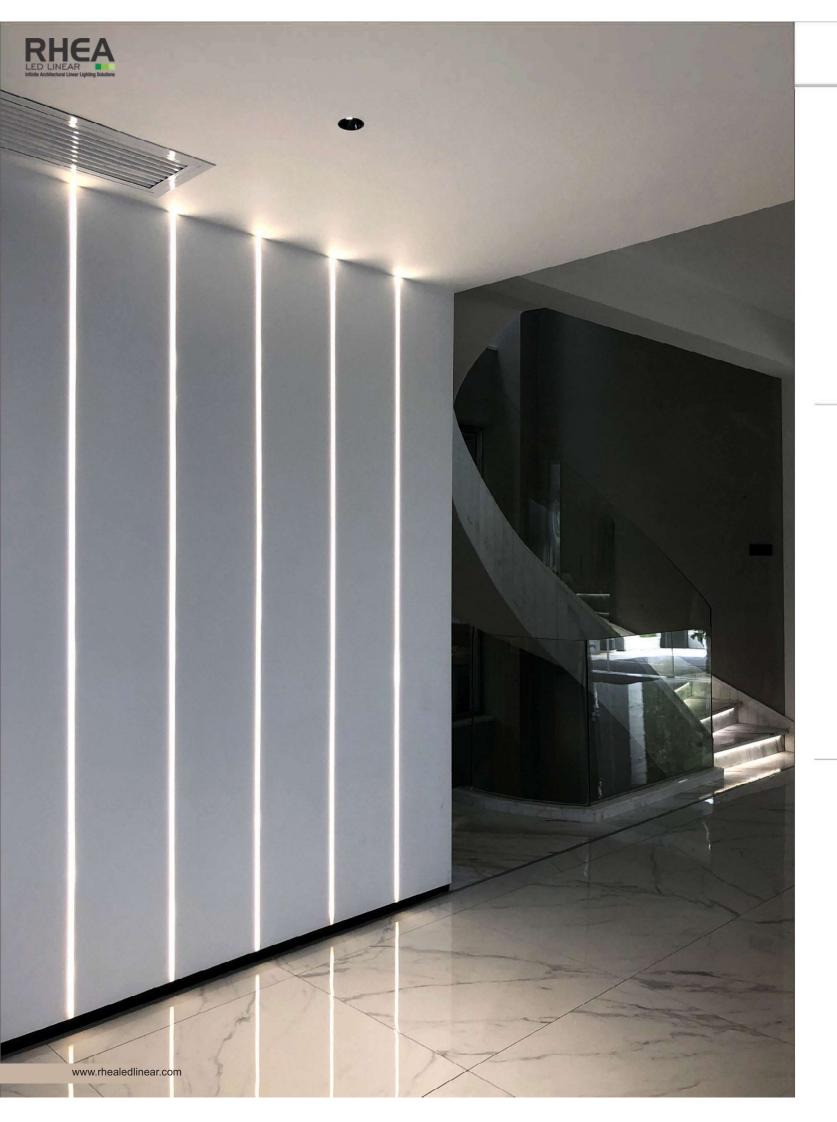








Step 02 Painting the plaster

Step 03







Step 01 Fix the profile on plasterboard

Step 02 Painting the plaster

Step 03 Paint lacquer(overcoating)







Step 01 Fix the profile on plasterboard

Step 02 Painting the plaster

Step 03 Paint lacquer(overcoating)



RHEALP068-R **INSTALLATION METHOD**





Paint lacquer(overcoating)

Step 04 Stick LED Strip

Step 05 Install Diffuser

RHEALP069-R INSTALLATION METHOD



Step 04 Stick LED Strip



Step 05 Install Diffuser

RHEALP069-R INSTALLATION METHOD






Step 04 Stick LED Strip



Step 05 Install Diffuser



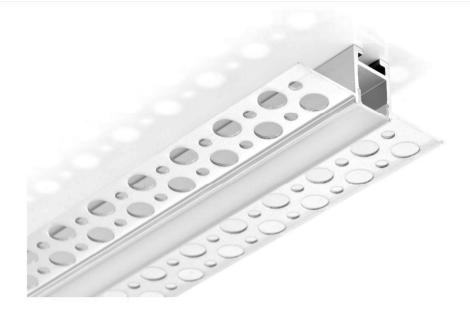


RHEALP079





End cap with hole End cap without hole


RHEALP080

End cap with hole End cap without hole

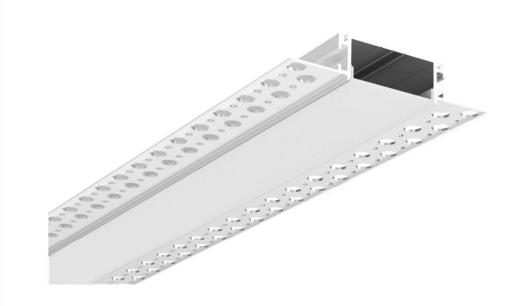





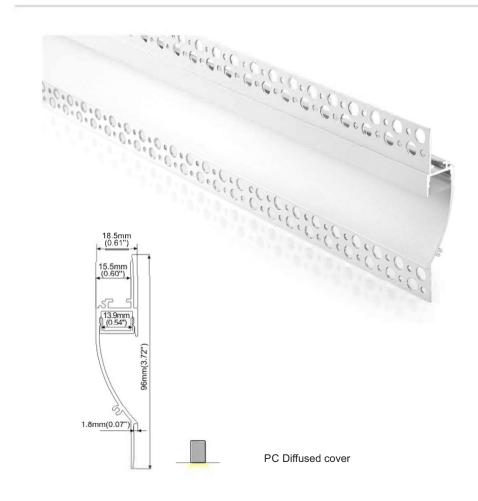



PC Diffused cover

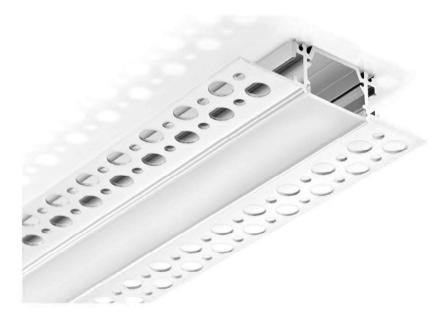



PC Diffused cover

www.rhealedlinear.com



RHEALP081-R



End cap with hole End cap without hole



PC Diffused cover


RHEALP082




End cap with hole End cap without hole



RHEALP083-R

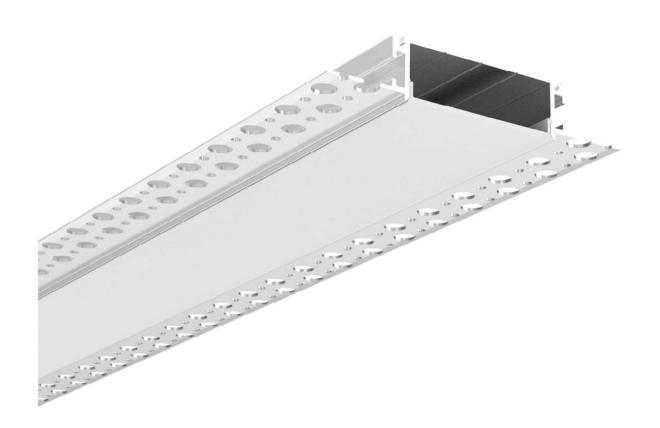




PC Diffused cover



End cap with hole End cap without hole



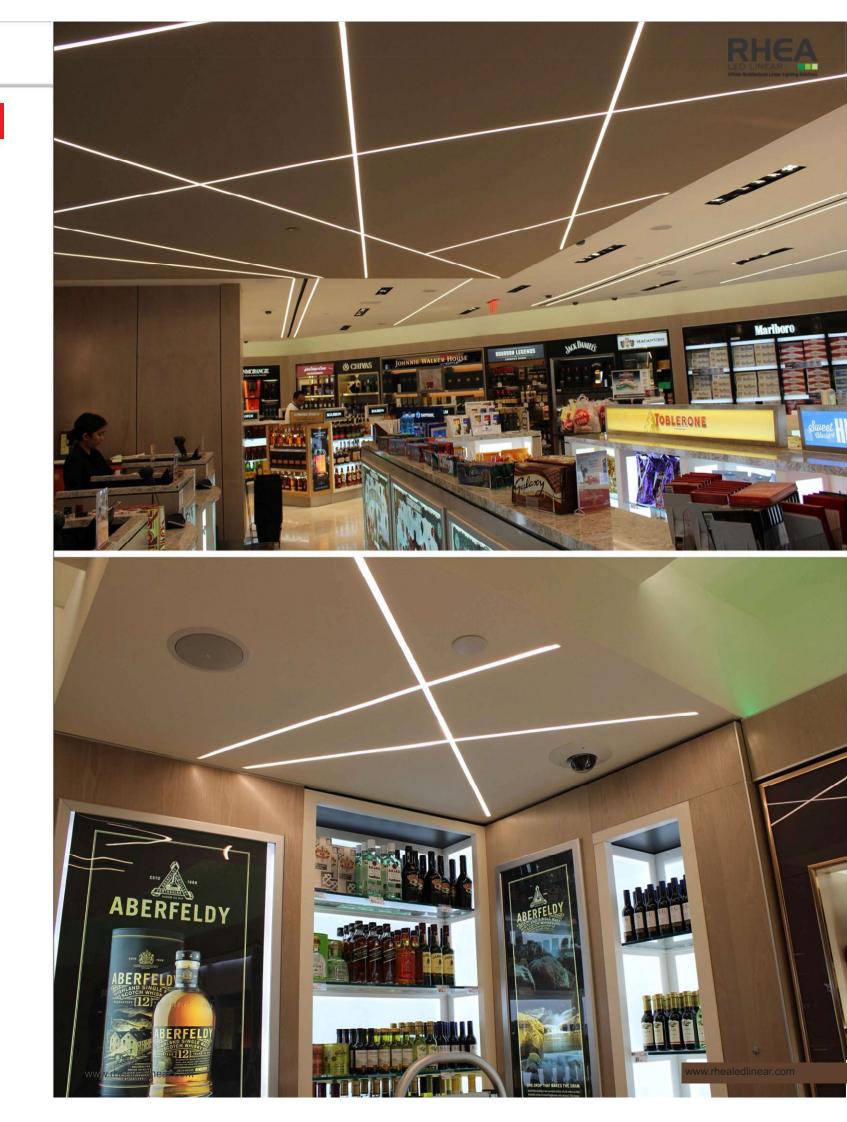







RHEALP084



End cap with hole End cap without hole





End cap with hole End cap without hole


PC Diffused cover

RHEALP086

End cap with hole End cap without hole

PC Diffused cover



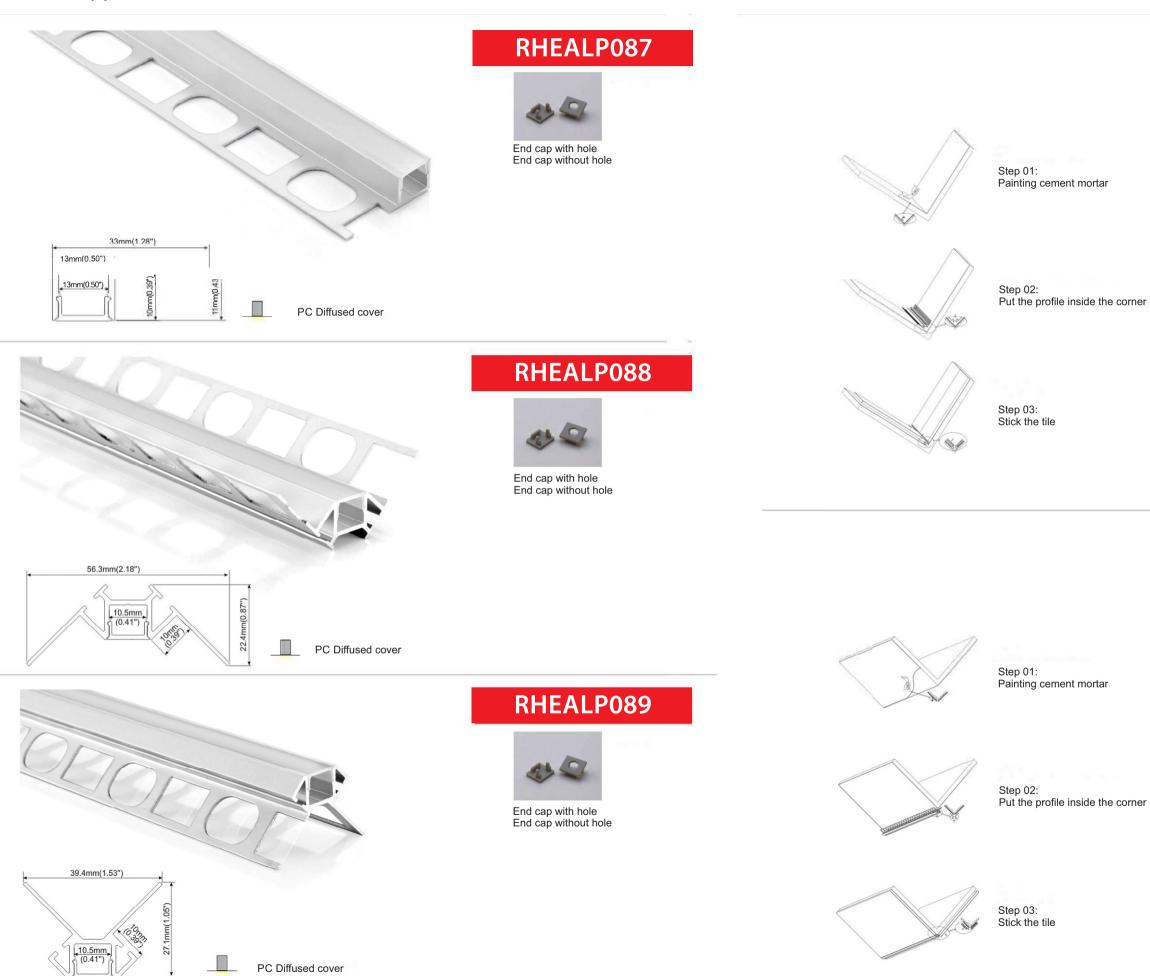

www.rhealedlinear.com



RHEALP088



Step 04: Stick the LED Strip



Step 05: Install Diffuser

RHEALP089





Step 04: Stick the LED Strip




Step 05: Install Diffuser



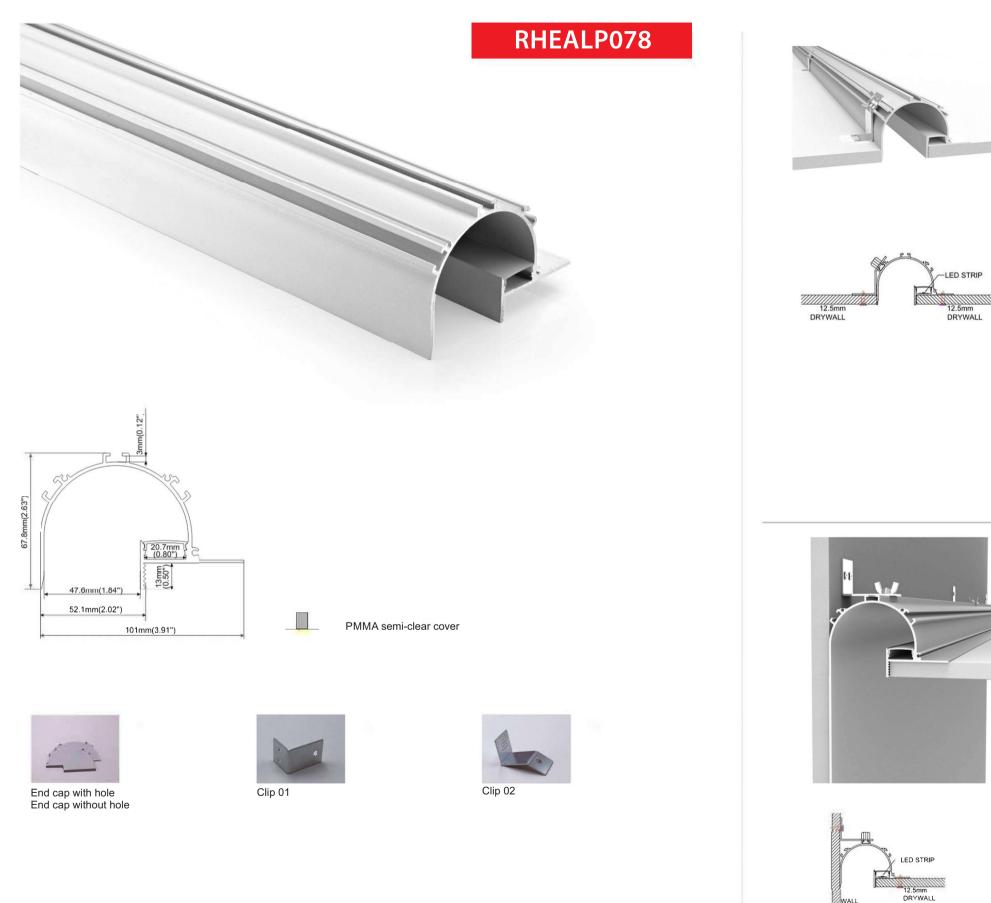





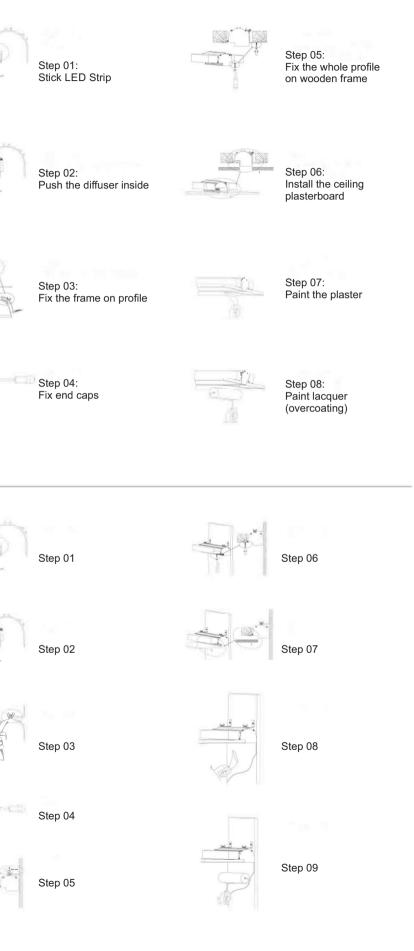

1000

+= } (_____


)



RHEALP090









End cap with hole End cap without hole

www.rhealedlinear.com




RHEALP091-E

.....

PMMA semi-clear cover




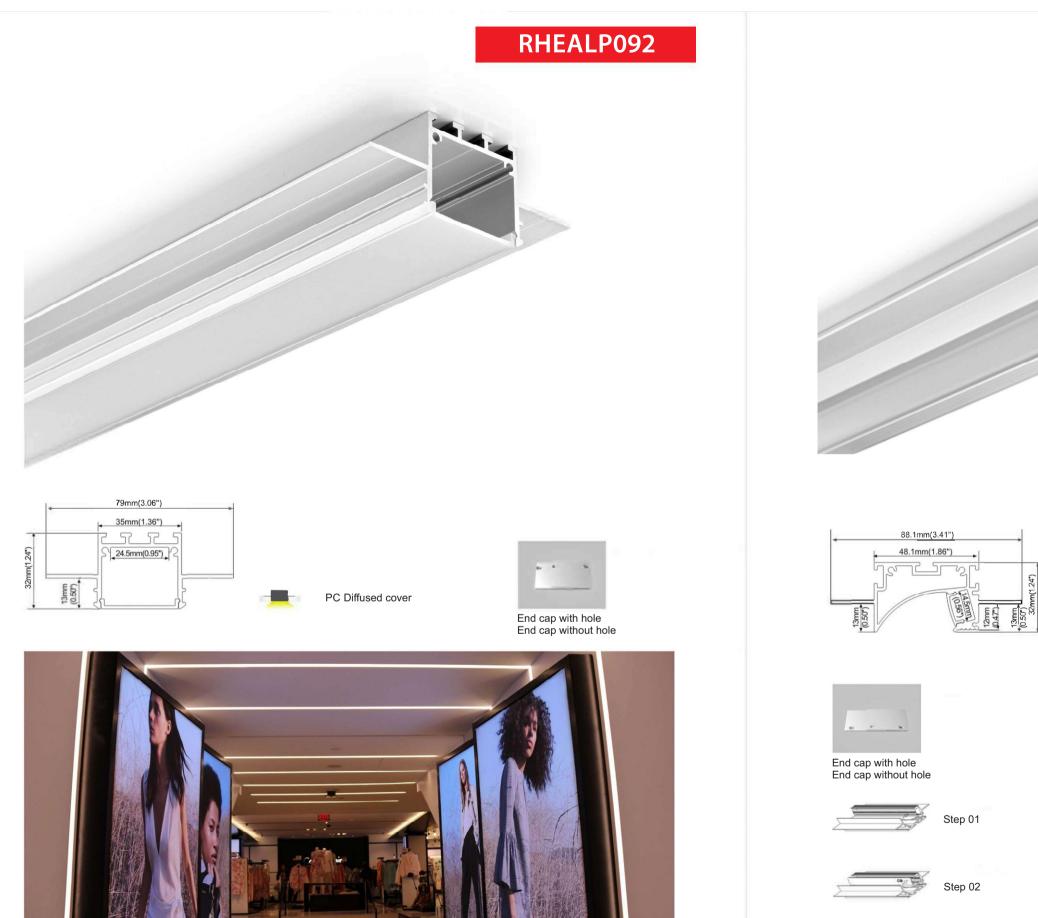

www.rhealedlinear.com



RHEALP093




PMMA semi-clear cover

105

0.56"

Step 03


4Z).

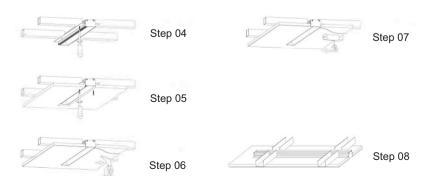











www.rhealedlinear.com

Step 02

Step 03

2 A

Step 04

Step 06




RHEALP095




PC Diffused cover


End cap with hole End cap without hole

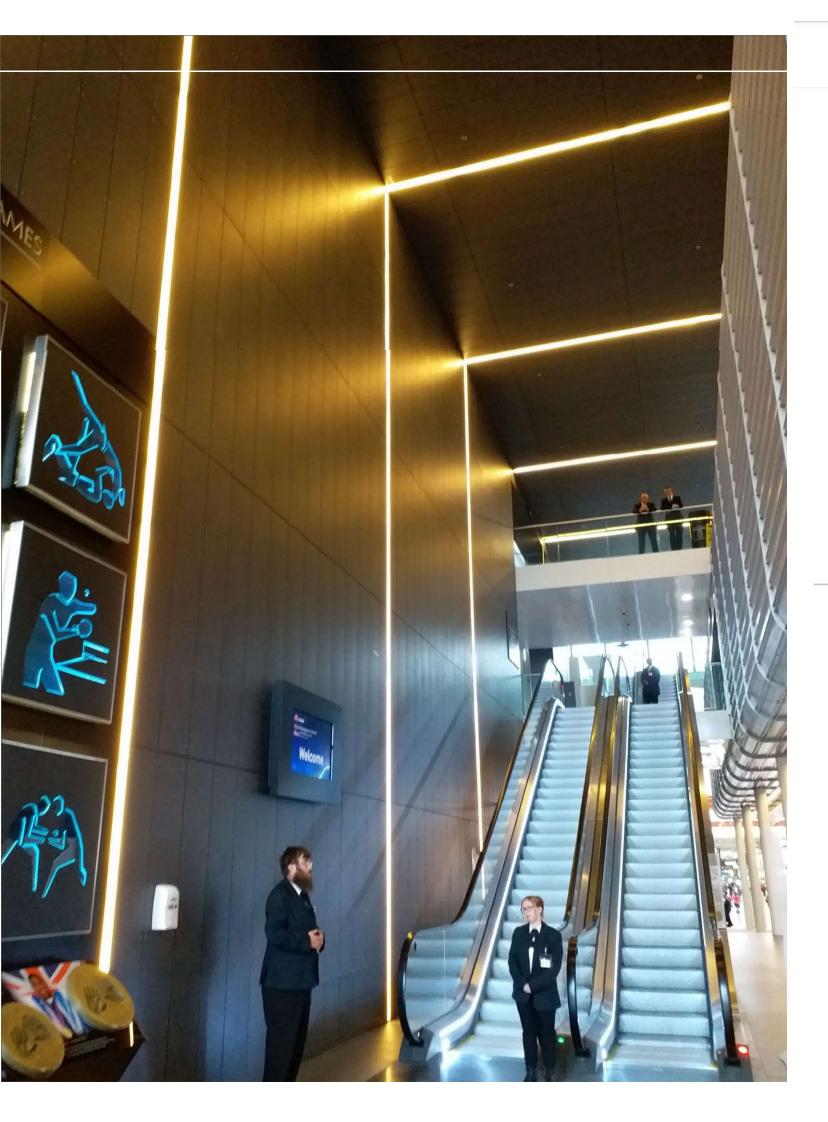











RHEALP110-S



End cap with hole End cap without hole


PC Diffused cover


RHEALP110-R




End cap with hole End cap without hole



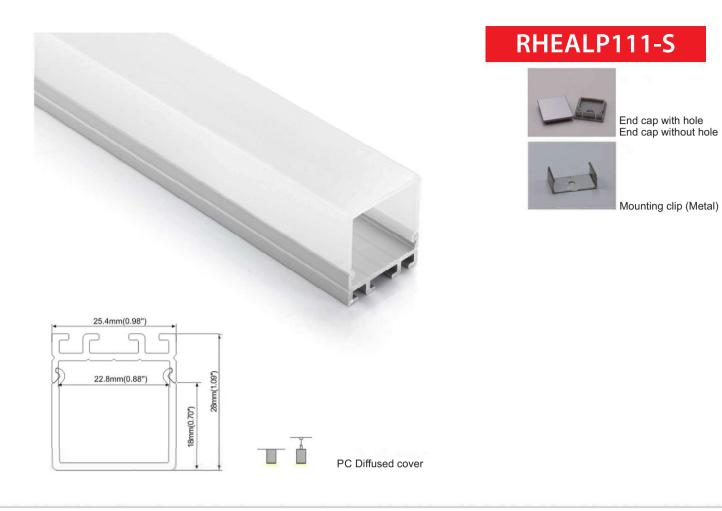







Step 01



Step 03







RHEALP118





End cap with hole End cap without hole

Step 04




Step 06


Step 05




Step 07



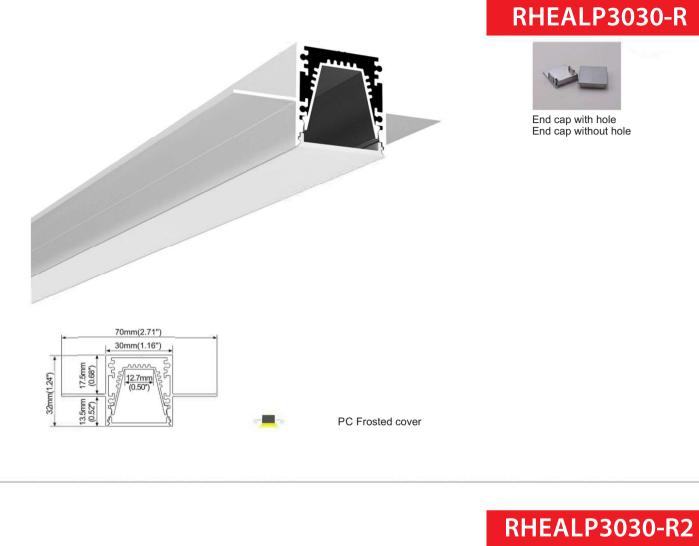










End cap with hole End cap without hole



Step 04



Step 01





www.rhealedlinear.com




RHEALP3030-R INSTALLAION METHOD



Step 05





Step 06








Step 08



RHEALD3010



	Silver	Black	White (ral9016)
Material:	AL60	63 - T5	
Surface:	Anod	ized/ Painting	
PC cover:	Diffus	ser/Transparent	/Opal
Power:	14.4W	//m	
Input voltage:	24VD	С	
Lamp beads:	156LE	EDs/m (3014)	
Lighting source width:	4 mm		
Available lengths:	0.5-3	m	
Application:	Comr	mercial lighting /	Indoorlighting



COVER

END CAP


H


Trans:05072

Opal: 05073 Diffuser:05074

Hole:30108


W/O hole: 30109







RHEALD3010B

Silver	ack White (ral9016)
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent /Opal
Power:	14.4W/m
Input voltage:	24VDC
Lamp beads:	156LEDs/m (3014)
Lighting source width:	4 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting













(E (P20)







RHEALD3010C



END CAP


i]

W/O hole:3010C9


Hole:3010C8

Material:	AL6063-T5
Surface:	Anodized/Painting
PC cover:	Diffuser / Transparent / Opal
Power:	14.4W/m
Input voltage:	24VDC
Lamp beads:	156LEDs/m (3014)
Lighting source width:	4 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting





(E (P20)




RHEALD4010

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent / Opal
Power:	14.4W/m
Input voltage:	24VDC
Lamp beads:	156LEDs/m (3014)
Lighting source width:	4 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting











Trans:05072

COVER












RHEALD5015

Silver	lack White (ral9016)
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent / Opal
Power:	14.4W/m
Input current:	24VDC
Lamp beads:	156LEDs/m (2835)
Lighting source width:	10 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting








17.1

(E (P20)

RHEALD5015C

Silver	Black White (ra19016)
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent / Opal
Power:	14.4W/m
Input current:	24VDC
Lamp beads:	156LEDs/m (2835)
Lighting source width	: 10 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting





RHEALD5015D

Silver Black

Material:

Surface:

PC cover:

Input current: Lamp beads:


Lighting source width:


Available lengths: Application:


Power:

RHEALD5015B


Silver	ack White (ral9016)
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent / Opal
Power:	14.4W/m
Input current:	24VDC
Lamp beads:	156LEDs/m (2835)
Lighting source width:	10 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

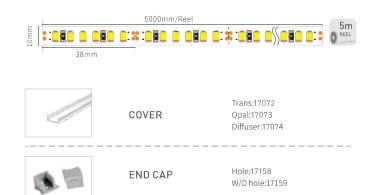











White

Diffuser / Transparent / Opal

Commercial lighting / Indoor lighting

AL6063-T5 Anodized/Painting

14.4W/m


156LEDs/m (2835)


24VDC

10 mm 0.5**-**3m







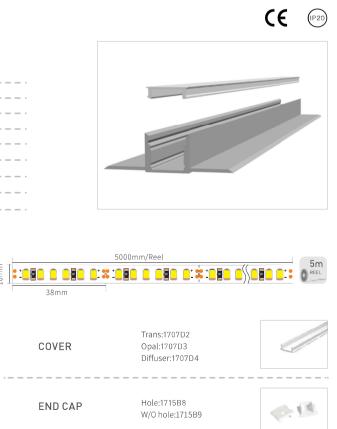



RHEALD5218

Silver Bl	ack White (ral9016)
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent / Opal
Power:	14.4W/m
Input voltage:	24VDC
Lamp beads:	120LEDs/m (3014)
Lighting source width:	4 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

END CAP

- 5 13

W/O hole:52189

Hole:52188




5000mm/Reel

50mm

RHEALD3611

_ _ _ _ _



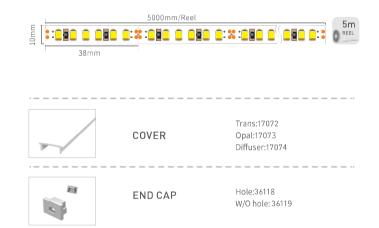

Diffuser:0809B4 OTHERS



COVER


1

Trans:0809B2

Opal:0809B3








CE (P20)


RHEALD6214

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent / Opal
Power:	28.8W/m
Input voltage:	24VDC
Lamp beads:	312LEDs/m (2835)
Lighting source width:	10 mm x2pcs
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting
	Artistic design/ Creative design










COVER END CAP 1. Trans:23102 Opal:23103 Hole:62148 W/O hole:62149 Diffuser:23104 OTHERS d. 2 .

S-90-2

S-90-1

S-180

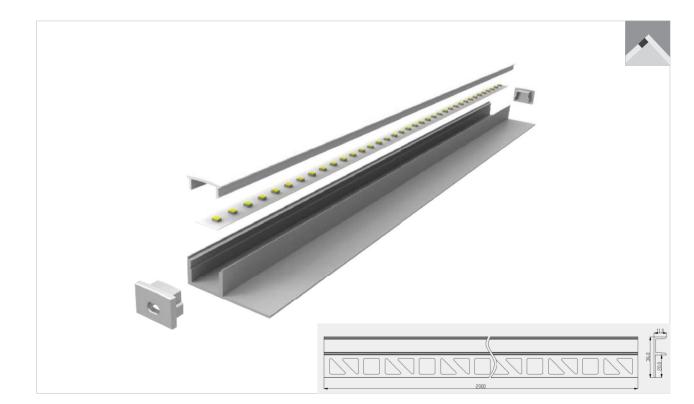







Material:	AL6063-T5
Surface:	Anodized/Painting
PC cover:	Diffuser / Transparent / Opal
Power:	14.4W/m
Input voltage:	24VDC
Lamp beads:	156LEDs/m (2835)
Lighting source width:	10 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting
	Artistic design/ Creative design












RHEALD4242/LD4242B

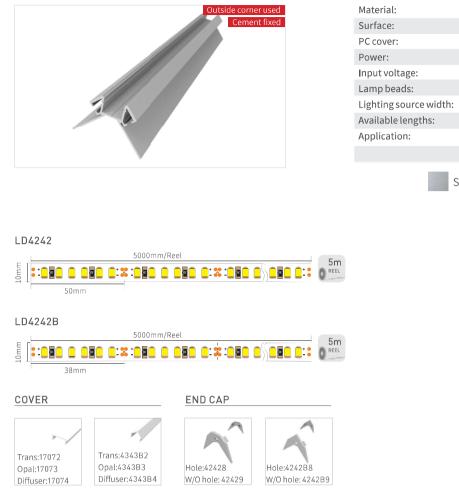






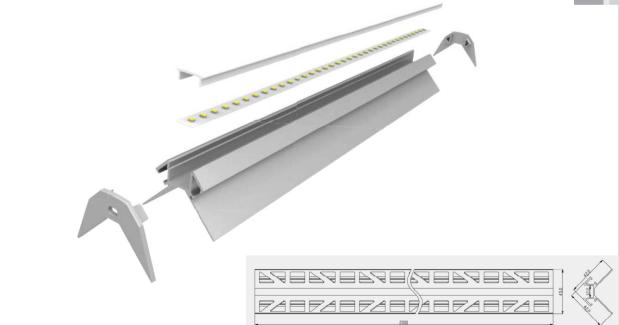


(E (P20)

AL6063-T5 Anodized/Painting Diffuser / Transparent / Opal 14.4W/m 24VDC 120/156LEDs/m (2835) 10 mm 0.5**-**3m Commercial lighting / Indoor lighting Artistic design/ Creative design White Silver Black LD4242 LD4242B









RHEALD4343/LD4343B

Material:	AL6063-T5	
Surface:	Anodized/ Painting	
PC cover:	Diffuser / Transparent / Opal	
Power:	14.4W/m	
Input voltage:	24VDC	
Lamp beads:	120/156LEDs/m (2835)	
Lighting source width:	10 mm	
Available lengths:	0.5-3m	
Application:	Commercial lighting / Indoor lighting	
	Artistic design/ Creative design	
Silver	Black White (ral9016)	
-ry c	ement S	LD4
1st	2nd	<u>C</u>



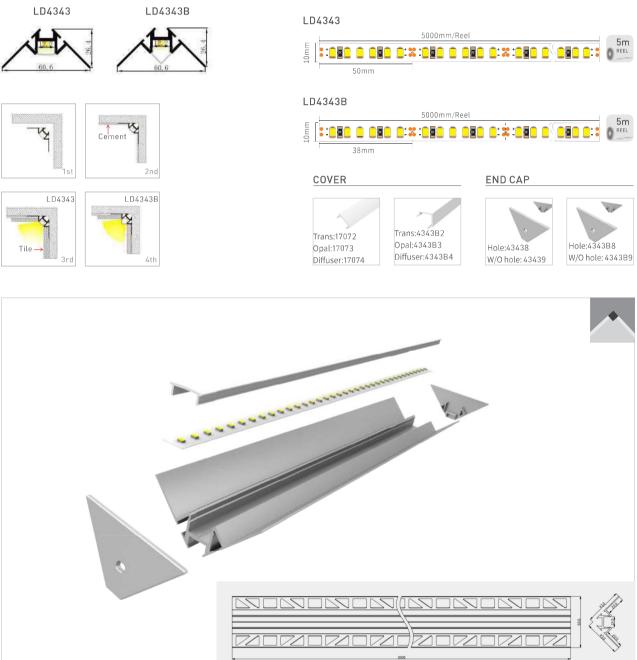







RHEA LED LINEAR Infinite Architectural Linear Lighting Solutions

RHEALD4520

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent / Opal
Power:	14.4W/m
Input voltage:	24VDC
Lamp beads:	120LEDs/m (2835)
Lighting source width:	10 mm
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting
	Artistic design/ Creative design
Silver Bl	ack White (ral9016)

COVER

END CAP

Hole:45208

W/O hole:45209



OTHERS





(E (P20)

40

•

M.

(E (P20)





White (ral9016) Black





5000mm/Reel







Hole:58158 END CAP W/O hole: 58159





