


Architectural Spot Light and Garden Light



Garden Spike Light

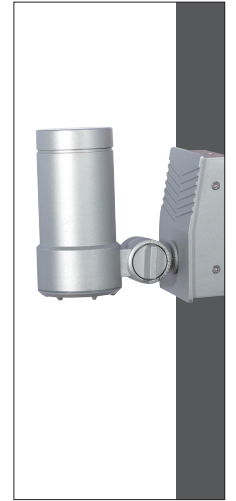

LED Colour Temperature

3000K
6000K

Optics

B33(B33D/B33F)	B51
L0109F023YH 9°	L0120D035HK 20°
L0115D023YH 15°	L0128D035HK 28°
L0120D023YH 20°	L0136D036HK 36°
L0130D023YH 30°	
L0145D023YH 45°	
B52	B56
L0120D044HK 20°	L0115D070LK 15°
L0124D044HK 24°	L0124D070LK 24°
L0136D044HK 36°	L0138D070LK 38°
L0160D044HK 60°	


Material Specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass, T=4mm
Gasket	Tooling shaped seal
LED	Nichia/CREE(Z5B3UD80171)
LED Driver	Constant Voltage Input, Constant Current Output
Lens/Reflector	Optical lens, efficiency ≥ 85%
Power Cable	H05RN-F 2X1.0mm ² L=0.3m (low voltage) H05RN-F 3X1.0mm ² L=0.3m (high voltage)
Spike	ABS spike 10A(B3TMB0158/B3TNB0126/B3TOB0128) ABS spike 7H(B3TPB0171)

Housing Color Option



Outer Dimensions

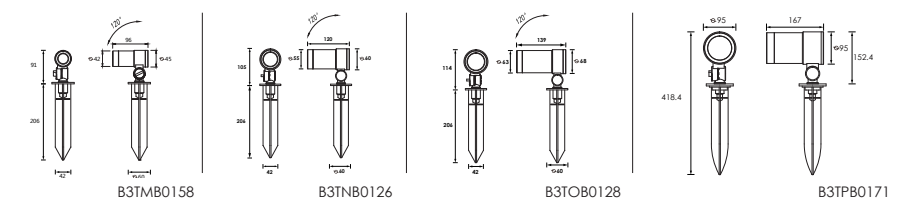


+9198 8640 006


www.est.net.in

Item	Light source	Reflector	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B3TMB0158	1×3W Nichia	B33D	20°	24V DC 120/240	2 4 V = 170 120V = 36 240V = 22	2 4 V = 4.1 120V = 4.3 240V = 4.3	Cool white =305 Warm white =274	06
B3TNB0126	1×6W Nichia	B51	28°	24V DC 120/240	2 4 V = 325 120V = 60 240V = 35	2 4 V = 7.8 120V = 7.4 240V = 7.4	Cool white =740 Warm white =667	06
B3TOB0128	1×10W Nichia	B52	24°	24V DC 120/240	2 4 V = 480 120V = 107 240V = 55	2 4 V = 11.5 120V = 12.6 240V = 12.3	Cool white =1200 Warm white =1315	06
B3TPB0171	1×20W CREE	B56	24°	24V DC 120/240	2 4 V = 958 120V = 180 240V = 93	2 4 V = 23 120V = 25 240V = 25.8	Cool white =1494 Warm white =1315	06


B3TMB0158

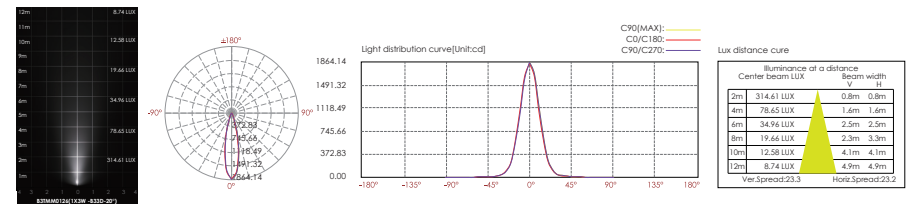


B3TNB0126

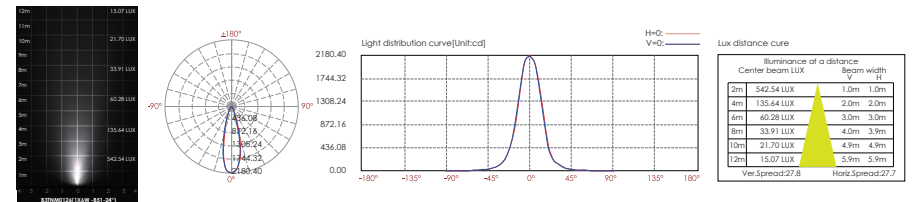

B3TOB0128

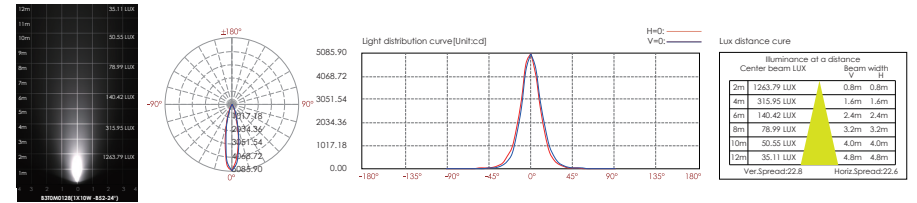

B3TPB0171

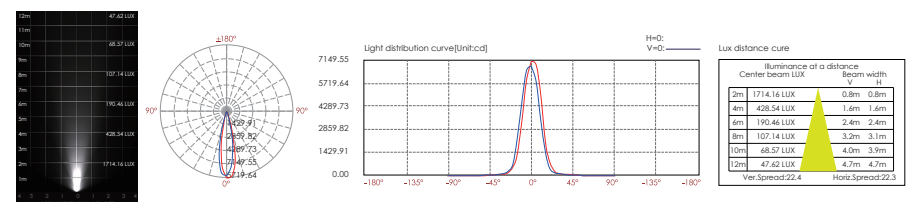


+9198 8640 006

www.est.net.in



Optional parts
Tree/pole strap

Outer Dimensions Unit:mm



RD001

Material:
nylon belt, Aluminum. 1056# fasten buckle



Multi-function base----compatible for both wall mounting and tree/pole strap mounting



R3TMM0124


R3TNM0126

R3TOM0128


B3TPM0171

Outer Dimensions


Unit:mm




R3TMM0124



R3TNM0126



R3TOM0128



B3TPM0171


Optional parts
Bevel cut hood



Outer Dimensions			
Unit:mm			
CA3009	CA3010	CA3011	CA3013

Material : Aluminium 6063#

Optional Parts: Bevel Cut Hood/Cap

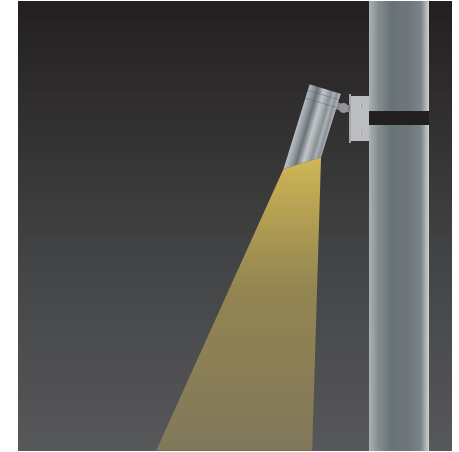

Outer Dimensions

Unit:mm

R3TMM0124	R3TNM0126	R3TOM0128	B3TPM0171

Optional parts Stick



R3TMP0124







R3TNP0126



R3TOP0128

Outer Dimensions


Unit:mm

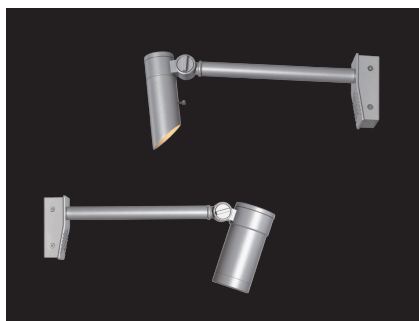


Tu001
25CM



Tu002
50CM



Tu003
75CM



www.est.net.in



Optional parts Bevel cut hood

Outer Dimensions

Unit:mm

108 74.3 Ø45	139 98.3 Ø40	164 118.4 Ø48	190 135.2 Ø55
CA3009	CA3010	CA3011	CA3013

Material : Aluminium 6063#

