




# JRF3-18R



Product Dimension

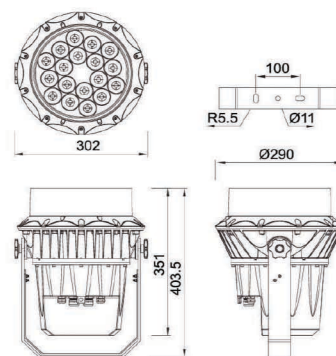

- The lamp body is using high strength die-casting aluminum, and cover using high strength toughened glass, anti-impact, abrasion resistant.
- Powerful features, easy to control, with 12 kinds of internal dynamic programs, and original logarithmic dimming, mixed lighting technology, which makes lighting soft and gorgeous.
- Integrated narrow lighting technology, can realize 4.5 degree beam angle.




Reflector



Composited Bracket

## Product Specification

Product Code	JRF3-18R
LED Quantity	18pcs
Rated Power	46.2W
Color	18Single /6R6G6B
Luminous Flux	3066/1703 lm
Installation Pipe Diameter	Φ11~100mm
Input Voltage	AC100-277V
Frequency Range	50/60Hz
Control Mode	CC/DMX12
Beam Angle	4.5°
Temperature of Working Condition	-35~50°C
Humidity of Working Condition	10~90%
LED Lifetime	70000h
Protection Grade	IP66
Net Weight	9.15kg
Gross Weight	9.85kg
Packing Size	365x350x475mm

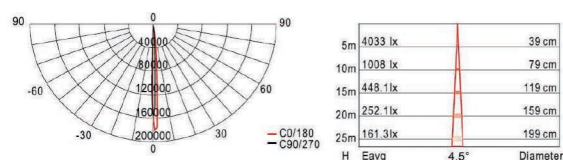

Packing size is outer size of box  
All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment  
Luminous flux is the maximum value among all kinds of light distribution.