


# JRF3-36



Product Dimension

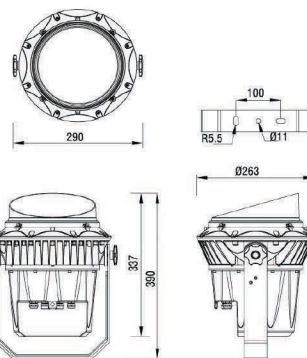

Visor



Composited Bracket

- Creative design and many proprietary technologies in this LED projector light, not only make it at the top-level at this area, but also make the light to be an artwork.
- The light body is using the high pressure diecast aluminum, with electrostatic plastic coating. Resist the impact and friction. Single or double bracket to work with. Also diffuser to against glare
- is available.

12 kinds of dynamic routines inside. The creative dimming and mixing technic can achieve the lighting mixing in the distance less than 1m, making pure and magnificent lighting.h

## Product Specification

Product Code	JRF3-36	JRF3-36/36x2.2W
LED Quantity	36pcs	36pcs
Rated Power	58/86W	87W
Color	36 Single /10R10G10B6W	36Single
Luminous Flux	4801/2719 lm	6193 lm
Installation Pipe Diameter	Φ 11×100mm	Φ 11×100mm
Input Voltage	AC100-277V	AC100-277V
Frequency Range	50/60Hz	50/60Hz
Control Mode	CC/DMX512	CC/DMX512
Beam Angle	10° 25° 40° 60°	10° 25° 40° 60°
Temperature of Working Condition	-35~50°C	-35~50°C
Humidity of Working Condition	10~90%	10~90%
LED Lifetime	70000h	70000h
Protection Grade	IP66	IP66
Net Weight	7.5kg	7.5kg
Gross Weight	8.05kg	8.05kg
Packing Size	360x330x450mm	360x330x450mm

Packing size is outer size of box  
All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment  
Luminous flux is the maximum value among all kinds of light distribution.

