



EST-JRF4-L

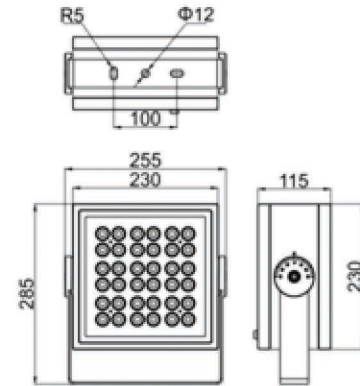


Product Dimension

Product Specification


Product name	EST-JRF4-L-120	EST-JRF4-L-80	EST-JRF4-L-60
LED Quantity	36pcs	36pcs	36pcs
Rated Power	120W	80W	60W
Input Voltage	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz
Control Mode	ON-OFF	ON-OFF	ON-OFF
Power Factor	> 0.9	> 0.9	> 0.9
Light Color	4000K	4000K	4000K
Luminous Flux	8763 lm	6363 lm	5040 lm
Color Rendering Index	> 80	> 80	> 80
Beam Angle	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°
Temperature of Working Condition	-35-50°C	-35-50°C	-35-50°C
Humidity of Working Condition	10-90%	10-90%	10-90%
LED Lifetime	> 70000h	> 70000h	> 70000h
Protection Grade	IP66 IK08	IP66 IK08	IP66 IK08
Net Weight	5.8kg	5.8kg	5.8kg
Gross Weight	6.8kg	6.8kg	6.8kg
Packing Size	321×289×348mm	321×289×348mm	321×289×348mm

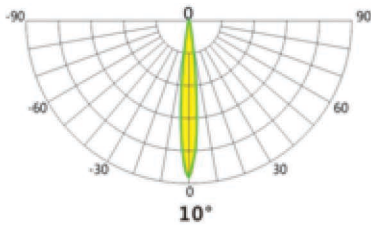


10°

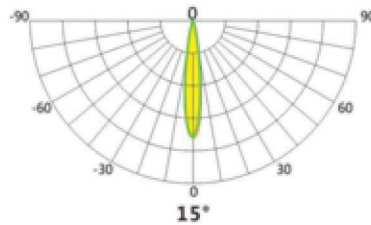


15°

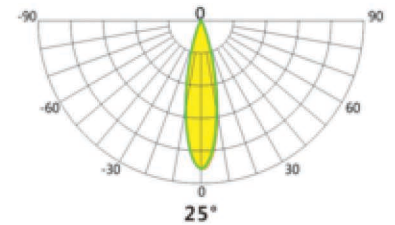


25°

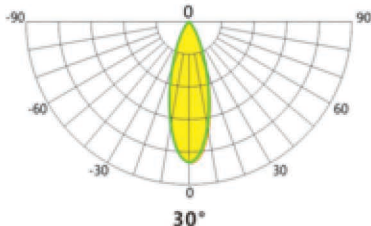

30°

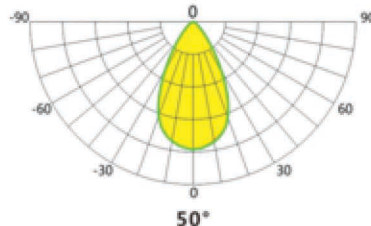


50°

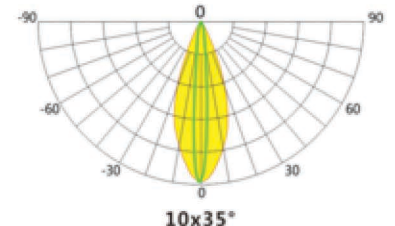

10x35°

EST-JRF4-L

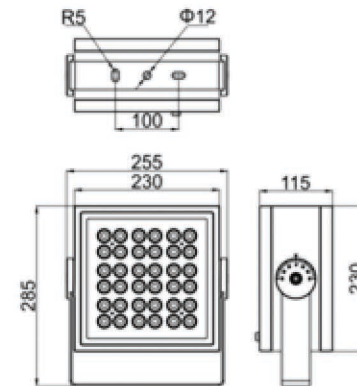

Product Dimension

Product Specification

Product name	EST-JRF4-L-80-C	EST-JRF4-L-60-C
LED Quantity	36pcs	36pcs
Rated Power	85W	65W
Input Voltage	AC100-277V 50/60Hz	AC100-277V 50/60Hz
Control Mode	DMX512	DMX512
Power Factor	> 0.9	> 0.9
Light Color	RGBW	RGBW
Luminous Flux	3622 lm	2952 lm
Color Rendering Index	W > 80	W > 80
Beam Angle	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°
Temperature of Working Condition	-35-50°C	-35-50°C
Humidity of Working Condition	10-90%	10-90%
LED Lifetime	> 70000h	> 70000h
Protection Grade	IP66 IK08	IP66 IK08
Net Weight	5.8kg	5.8kg
Gross Weight	6.8kg	6.8kg
Packing Size	321×289×348mm	321×289×348mm

