
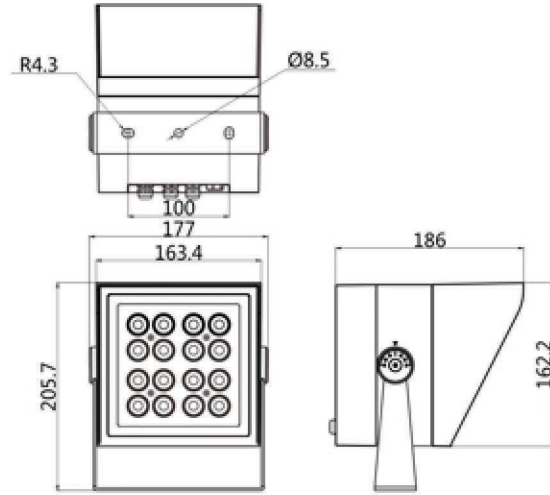








EST-JRF4-M-H

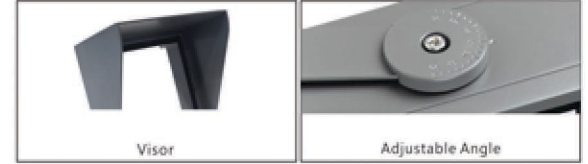


Product Dimension

Product Specification

Product name	EST-JRF4-M-60H	EST-JRF4-M-40H
LED Quantity	16pcs	16pcs
Rated Power	56W	38W
Input Voltage	AC100-277V 50/60Hz	AC100-277V 50/60Hz
Control Mode	ON-OFF	ON-OFF
Power Factor	> 0.9	> 0.9
Light Color	4000K	4000K
Luminous Flux	3700 lm	2686 lm
Color Rendering Index	> 80	> 80
Beam Angle	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°
Temperature of Working Condition	-35-50°C	-35-50°C
Humidity of Working Condition	10-90%	10-90%
LED Lifetime	> 70000h	> 70000h
Protection Grade	IP66 IK08	IP66 IK08
Net Weight	3.1kg	3.1kg
Gross Weight	3.5kg	3.5kg
Packing Size	462×410×267mm	462×410×267mm

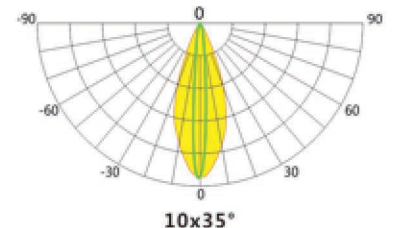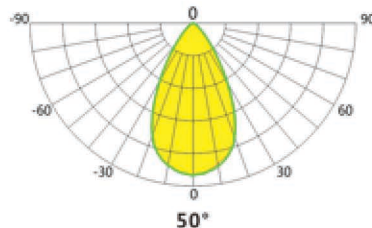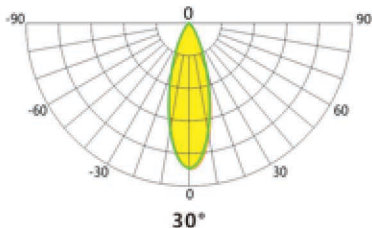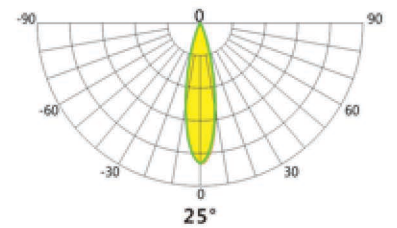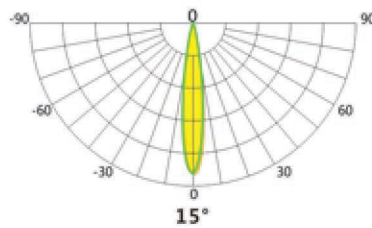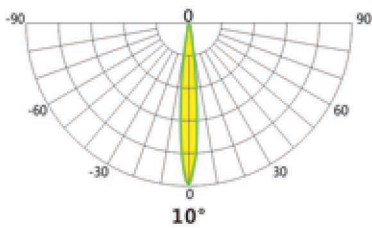







EST-JRF4-M-H

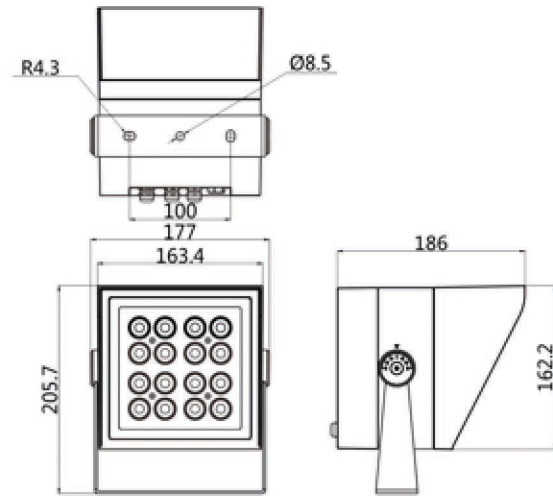


Product Dimension

Product Specification

Product name	EST-JRF4-M-30H	EST-JRF4-M-20H
LED Quantity	16pcs	16pcs
Rated Power	27W	18W
Input Voltage	AC100-277V 50/60Hz	AC100-277V 50/60Hz
Control Mode	ON-OFF	ON-OFF
Power Factor	> 0.9	> 0.9
Light Color	4000K	4000K
Luminous Flux	2128 lm	1520 lm
Color Rendering Index	> 80	> 80
Beam Angle	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°
Temperature of Working Condition	-35-50°C	-35-50°C
Humidity of Working Condition	10-90%	10-90%
LED Lifetime	> 70000h	> 70000h
Protection Grade	IP66 IK08	IP66 IK08
Net Weight	3.1kg	3.1kg
Gross Weight	3.5kg	3.5kg
Packing Size	462×410×267mm	462×410×267mm

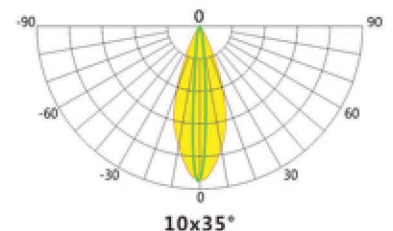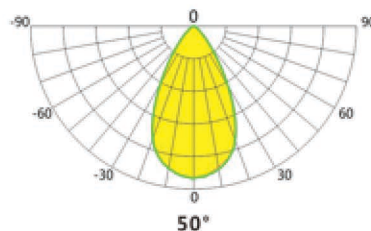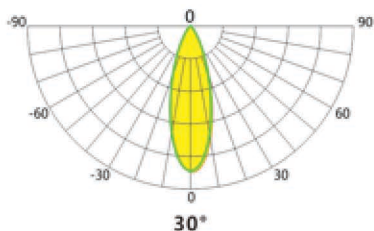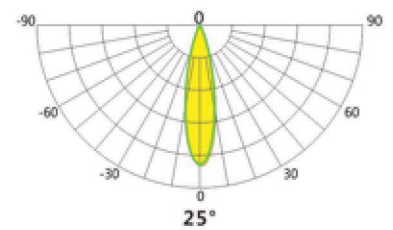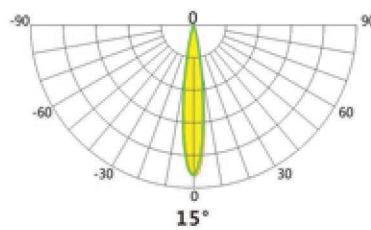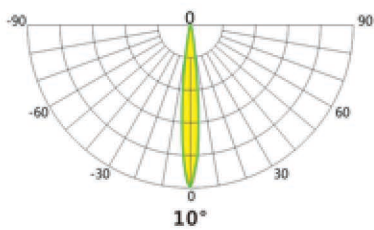

EST-JRF4-M-H

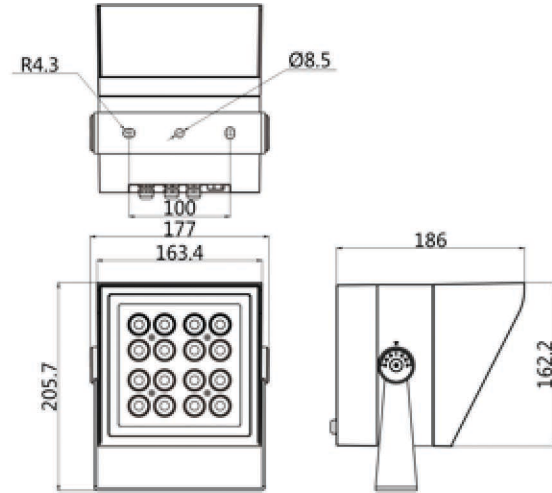

Product Dimension

Product Specification

Product name	EST-JRF4-M-40H-C	EST-JRF4-M-30H-C	EST-JRF4-M-20H-C
LED Quantity	16pcs	16pcs	16pcs
Rated Power	40W	30W	20W
Input Voltage	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz
Control Mode	DMX512	DMX512	DMX512
Power Factor	> 0.9	> 0.9	> 0.9
Light Color	RGBW	RGBW	RGBW
Luminous Flux	1530 lm	1247 lm	902 lm
Color Rendering Index	W > 80	W > 80	W > 80
Beam Angle	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°
Temperature of Working Condition	-35-50°C	-35-50°C	-35-50°C
Humidity of Working Condition	10-90%	10-90%	10-90%
LED Lifetime	> 70000h	> 70000h	> 70000h
Protection Grade	IP66 IK08	IP66 IK08	IP66 IK08
Net Weight	3.2kg	3.2kg	3.2kg
Gross Weight	3.6kg	3.6kg	3.6kg
Packing Size	462×410×267mm	462×410×267mm	462×410×267mm

