








EST-JRF4-S

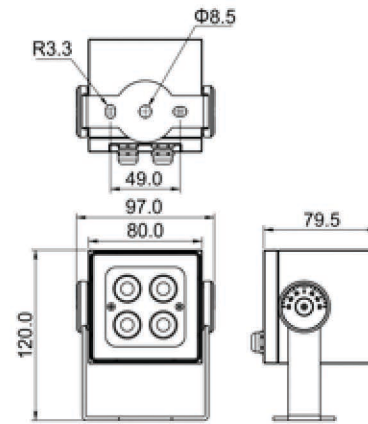


Product Dimension

Product Specification

Product name	EST-JRF4-S-10	EST-JRF4-S-5
LED Quantity	4pcs	4pcs
Rated Power	10W	5W
Input Voltage	DC24V	DC24V
Control Mode	ON-OFF	ON-OFF
Power Factor	—	—
Light Color	Single Colour/RGBW	Single Colour/RGBW
Luminous Flux	760 lm	448 lm
Color Rendering Index	> 80	> 80
Beam Angle	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°
Temperature of Working Condition	-35-50°C	-35-50°C
Humidity of Working Condition	10-90%	10-90%
LED Lifetime	> 70000h	> 70000h
Protection Grade	IP66 IK08	IP66 IK08
Net Weight	1.0kg	1.0kg
Gross Weight	1.12kg	1.12kg
Packing Size	483×292×262mm	483×292×262mm

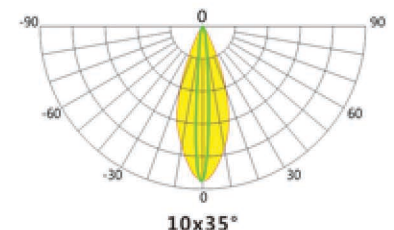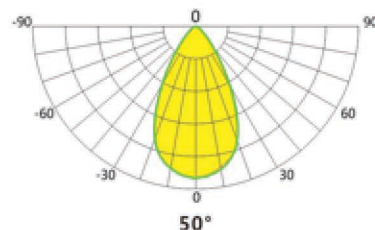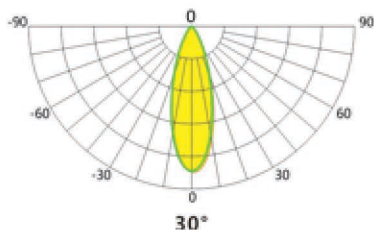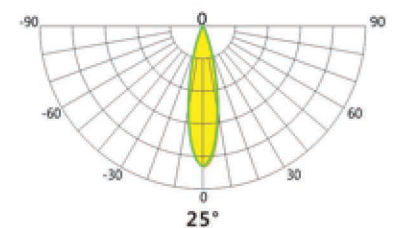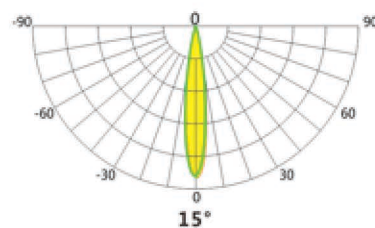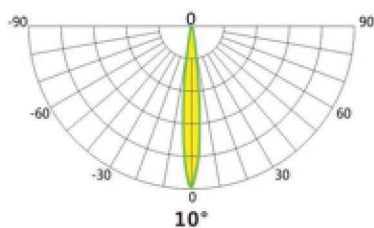

EST-JRF4-S

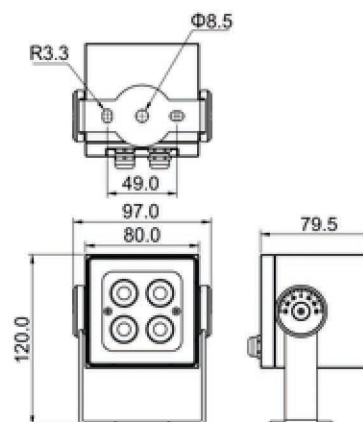

Product Dimension

Product Specification

Product name	EST-JRF4-S-10-C	EST-JRF4-S-5-C
LED Quantity	4pcs	4pcs
Rated Power	10W	5W
Input Voltage	DC24V	DC24V
Control Mode	DMX512	DMX512
Power Factor	—	—
Color	RGBW	RGBW
Luminous Flux	420 lm	248 lm
Color Rendering Index	> 80	> 80
Beam Angle	10°/15°/25°/30°/50°/10×35°	10°/15°/25°/30°/50°/10×35°
Temperature of Working Condition	-35-50°C	-35-50°C
Humidity of Working Condition	10-90%	10-90%
LED Lifetime	> 70000h	> 70000h
Protection Grade	IP66 IK08	IP66 IK08
Net Weight	1.0kg	1.0kg
Gross Weight	1.12kg	1.12kg
Packing Size	483×292×262mm	483×292×262mm

