



LED COLOUR TEMPERATURE


2000K • 3000K • 6000K

OPTICS




OUTER DIMENSIONS & ACCESSORIES

Unit:mm

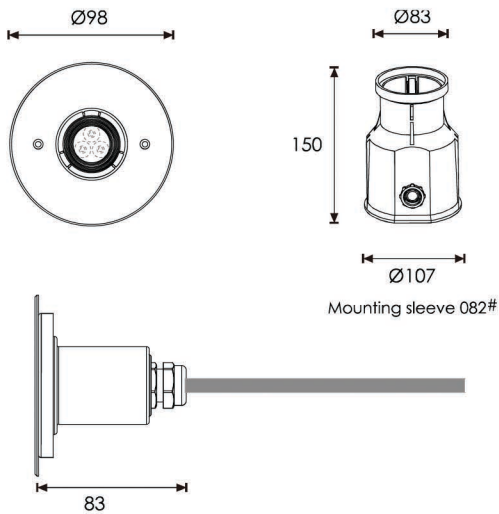

MATERIAL SPECIFICATIONS

FRONT COVER & HOUSING	Hard chromeplated molding shaped SUS 316L# stainless steel housing
GASKET	EPDM gasket
LIGHT WINDOW	Step tempered glass, T=8mm
LENS	All-in-one optical lens, efficiency≥85%
CABLE GLAND	IP68 PG-11 copper with nickel-coated
PCB	Excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk
LED DRIVER	Constant Voltage Input, Constant Current Output
APPLICATION ENVIRONMENT	Temperature of water between -20°C~40°C less than 1 meter depth
POWER CABLE	H07RN-F 2X1.0mm L=3m
DIMMABLE SUPPORT	Triac PWM 1-10V Dali

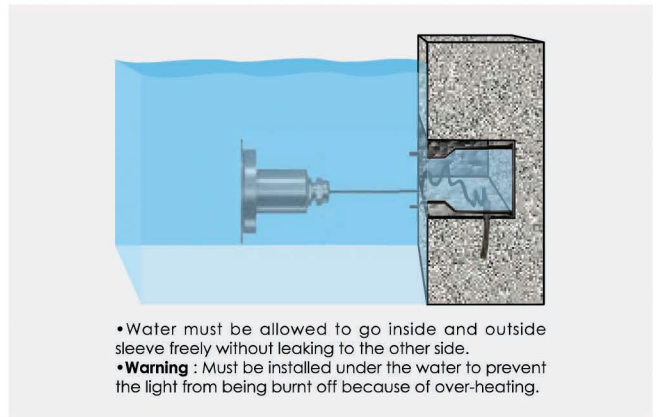

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
A4AA0357	3×2W Single color	A18	30°	24V DC	245	5.9	Cool White = 466 Warm White = 383	07

PHOTOMETRIC CURVES

