

Asymmetrical Recessed LED Stair & Wall Light

Front cover is made by Hard chrome-plated stainless steel 316L#



LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

OPTICS




C11



45°
35°
L01 35° F019HZ

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

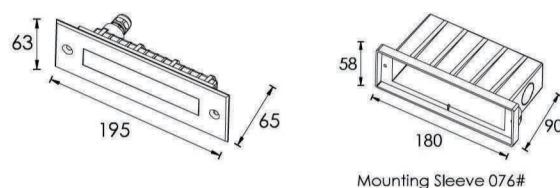



MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B	
LIGHT WINDOW	1 Step tempered glass.T=8mm	
CABLE GLAND	1 IP68 PG-9 PA66	
GASKET	1 Tooling shaped seal	
LED DRIVER	1 Constant Voltage Input,Constant Current Output	
OPERATING TEMPERATURE	1 -20°C~40°C	
POWER CABLE	H05RN-F 2X1.0mm2 L=0.5m (low voltage) H05RN-F 3X1.0mm2 L=0.5m (high voltage)	
MOUNTING SLEEVE	1 ABS 076#	
DIMMABLE SUPPORT	1 Triac PWM 1-10V Dali	


TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(mA)	CONSUMPTION(W)	LUMINANCE(lm)	IK
C1FL0357	3×2W OSRAM	C11	45° 35°	24V DC 120/240	24V = 200 120V = 47 240V = 25	24V = 5.7 120V = 6.2 240V = 5.7	Cool White = 400 Warm White = 285	08


PHOTOMETRIC CURVES

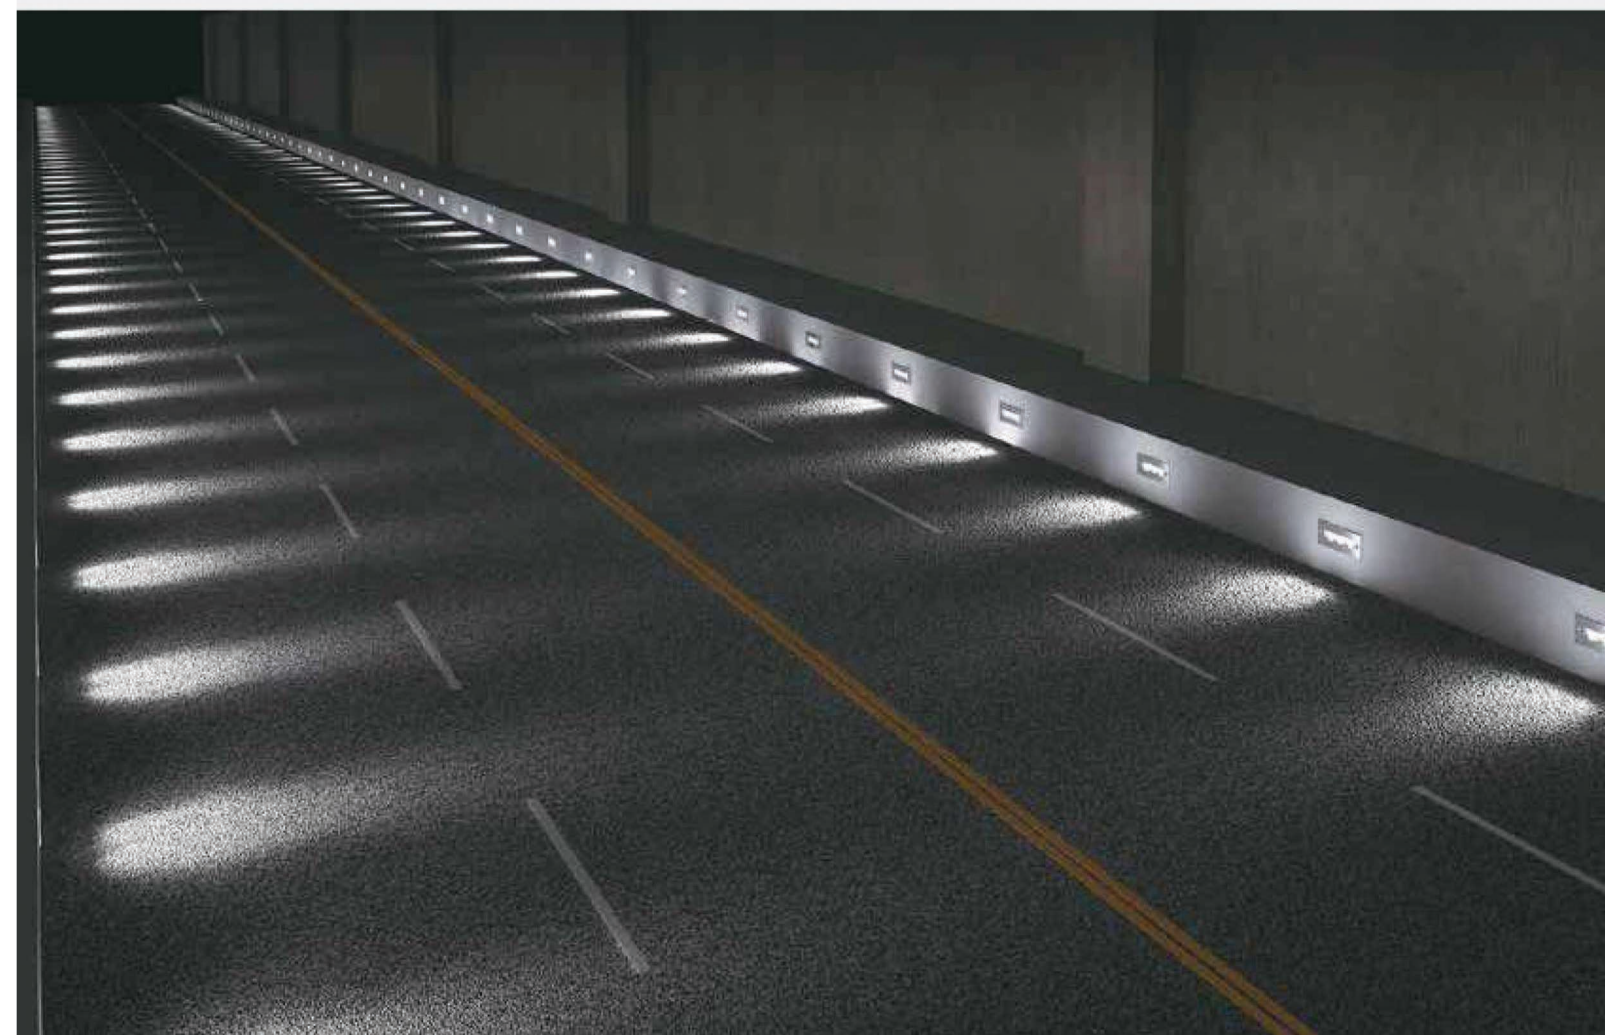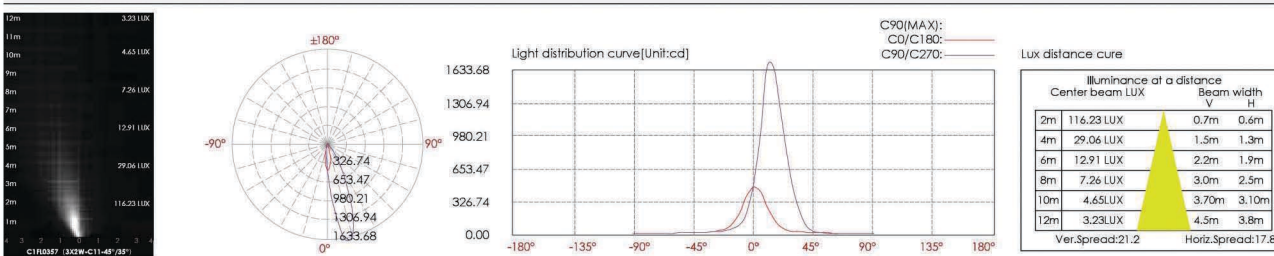

MOUNTING SLEEVE CHARACTERISTIC



High Voltage Type

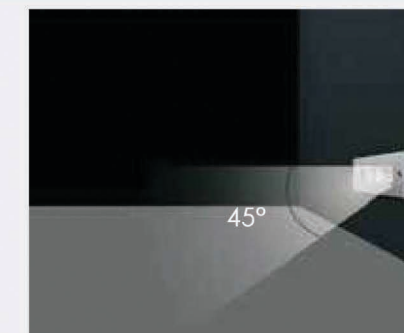

Impression Drawing of Lens

- The right picture – the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.