

6L Series
Symmetrical 24V DC
IP-66 High Luminance Wall Washer




A6LA0658
A6LA1258

LED COLOUR TEMPERATURE


2000K • 3000K • 6000K

OUTER DIMENSIONS

Unit:mm

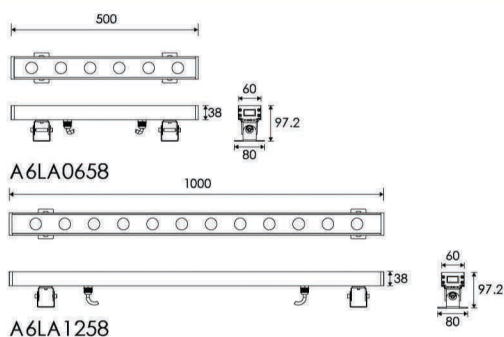

Low voltage input (24VDC) power cord model

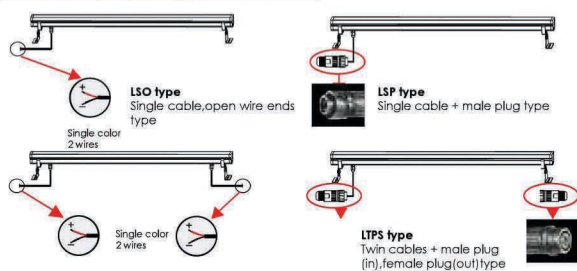

OPTICS



A24 15°
L0115D038LK 15°



A24
15°



A24 30°
L0130D038LK 30°



A24
30°

MATERIAL SPECIFICATIONS

Housing	Extruded aluminum, powder coated
Lens	Optical lens, efficiency ≥ 85%
Light Window	Tempered glass, T=4mm
Cable gland	IP-68 PG-13.5 PA66
Gasket	Glass and housing are silicone sealed
LED	NICHIA SMD 3535
Operating temperature	-20°C ~ 40°C
Bracket	12# Die-casting powder coated aluminum
Power Cable	H07RN-F 2X1.5mm² L=0.25m
Dimmable Support	Triac PWM 1-10V Dali

Optional Honeycomb Louver



TECHNICAL DATA

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Length L=(mm)	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
A6LA0658	6X4W Nichia	A24	15°	525	24V DC	24V = 1200	24V = 28.8	Cool white 2236 Warm white 1834	05
A6LA1258	12X4W Nichia	A24	15°	1025	24V DC	24V = 2380	24V = 57.6	Cool white 4417 Warm white 3622	05