

6L Series  
Symmetrical 120/240V  
IP-66 High Luminance Wall Washer




**LED COLOUR TEMPERATURE**

2000K · 3000K · 6000K

**OUTER DIMENSIONS**

Unit:mm

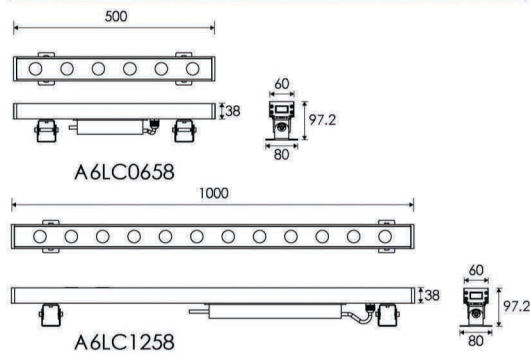

**OPTICS**



**A24 15°**  
L0115D038LK 15°



**A24 30°**  
L0130D038LK 30°

**A24**

15°




30°


**MATERIAL SPECIFICATIONS**

<b>Housing</b>		Extruded aluminum, powder coated
<b>Lens</b>		Optical lens, efficiency ≥ 85%
<b>Light Window</b>		Tempered glass, T=4mm
<b>Cable gland</b>		IP-68 PG-9 PA66
<b>Gasket</b>		Glass and housing are silicone sealed
<b>LED</b>		NICHIA SMD 3535
<b>Operating temperature</b>		-20°C ~ 40°C
<b>Bracket</b>		12# Die-casting powder coated aluminum
<b>Power Cable</b>		H05RN-F 3X1.0mm <sup>2</sup> L=0.5m

**Optional Honeycomb Louver**



**High voltage input (100V-240V) power cord wiring model**



**TECHNICAL DATA**

Item	Light source	The manufacturer selected lens	lens degree(°)θ1/2	Length L=(mm)	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
<b>A6LC0658</b>	6X4W Nichia	A24	15°	525	120/240V	120V = 222 240V = 114	120V = 26 240V = 26.1	Cool white =2236 Warm white =1834	05
<b>A6LC1258</b>	12X4W Nichia	A24	15°	1025	120/240V	120V = 425 240V = 214	120V = 50 240V = 51	Cool white =4417 Warm white =3622	05