


IP-65 Slim Type Linear Wall Washer

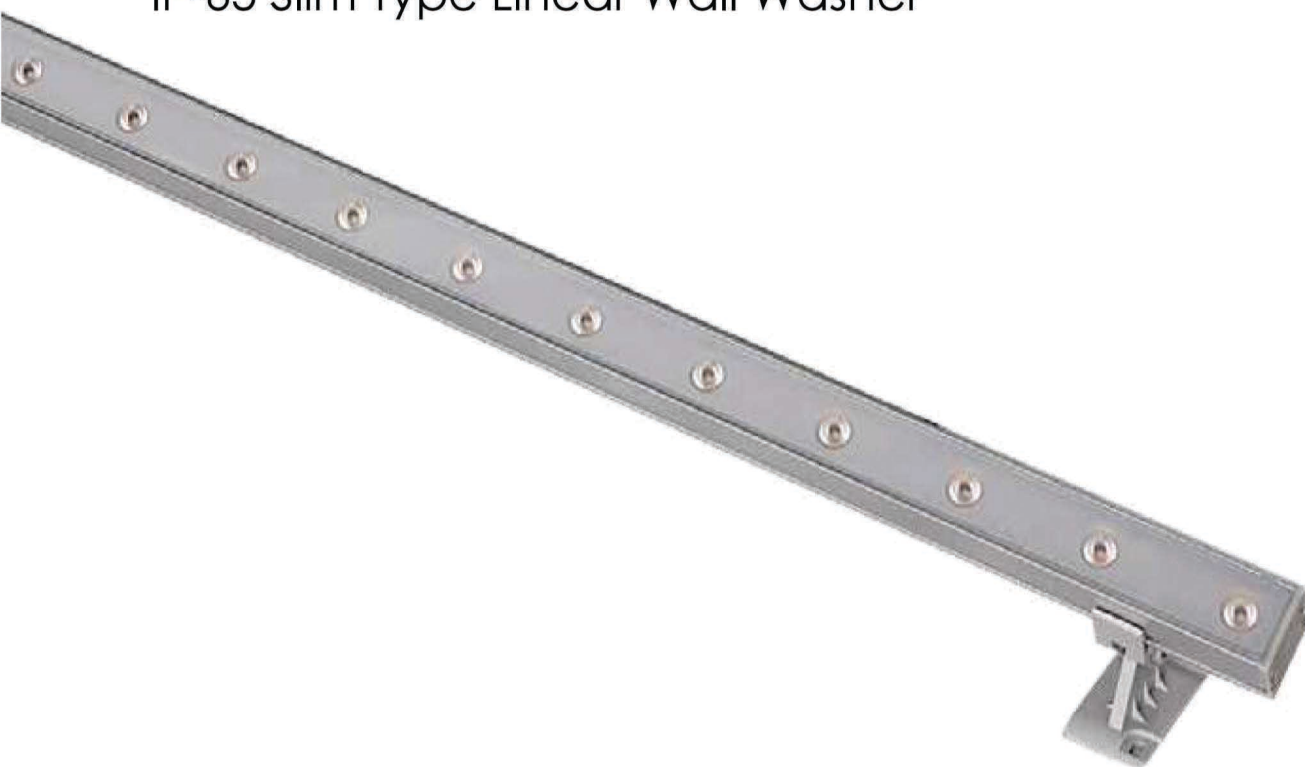


LED COLOUR TEMPERATURE


2000K · 3000K · 6000K

OUTER DIMENSIONS & ACCESSORIES


Unit:mm




B6IB0634



B6IB1234

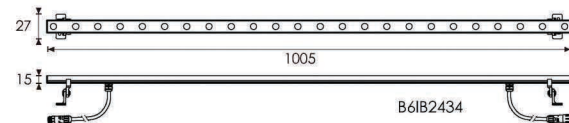

B6IB2434

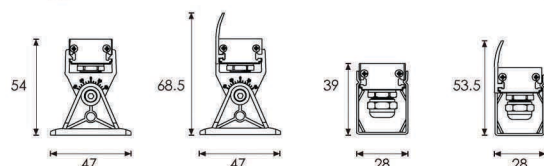


OPTICS



MATERIAL SPECIFICATIONS

HOUSING	Aluminum extrusion #6061, finish: Anodized or Painting
BRACKET	Nylon Rotatable type bracket or Stainless steel Angle Fixed type bracket
LIGHT WINDOW	Tempered glass T=2mm2 with printing.
CABLE GLAND	Copper PG-7 IP65
POWER CABLE	H03VV-F 2X0.75mm2 L=20 cm With Plug/Socket connector MAX capacity of Current=5A
DIMMABLE SUPPORT	Triac PWM 1-10V Dim

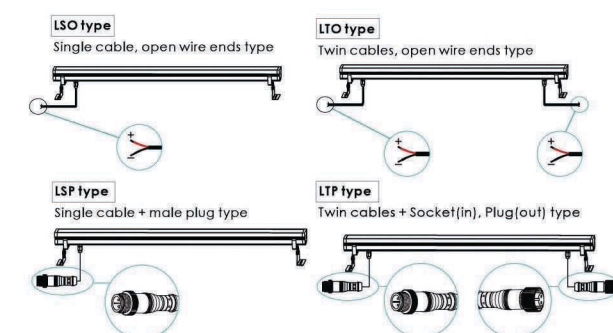

OPTIONAL PARTS



•Air Valve



•Stainless Steel Bracket




•Plug/Socket Connector



•Cap-Optional Accessory



•Cap-Optional Accessory



The cap can effectively :
1. Reduce the people view angle to the light
2. concentrate the brightness



The bracket of Rotatable type



•Bracket



The bracket of Angle-Fixed type



Option

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENGTH(MM)	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
B6IB0634	6×0.5W NICHIA	B38	255	40°	24V DC	152	3.6	Cool White = 320 Warm White = 289	05
B6IB1234	12×0.5W NICHIA	B38	505	40°	24V DC	305	7.30	Cool White = 557 Warm White = 510	05
B6IB2434	24×0.5W NICHIA	B38	1005	40°	24V DC	611	14.7	Cool White = 1114 Warm White = 1020	05

PHOTOMETRIC CURVES

