

Symmetrical 120/240V  
IP-66 Slim Light Bar





**B6KC1257**  
**B6KC2457**

**LED COLOUR TEMPERATURE**


2000K · 3000K · 6000K

**OUTER DIMENSIONS**


Unit:mm

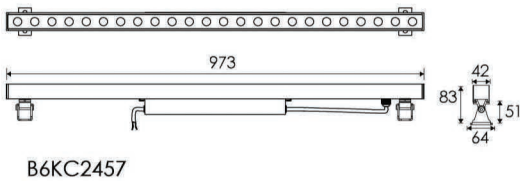

**High voltage input (100V-240V) power cord wiring model**

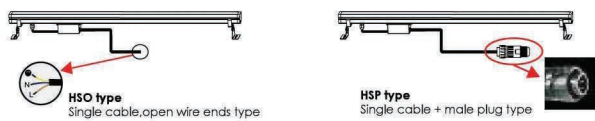

**OPTICS**

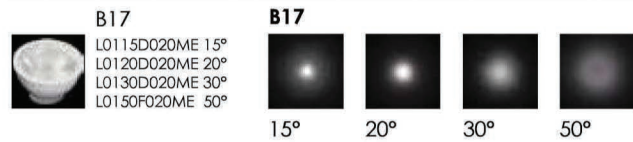

**MATERIAL SPECIFICATIONS**

<b>Housing</b>	Extruded aluminum anodized finishing or powder painting
<b>Lens</b>	Optical lens efficiency ≥ 85%
<b>Light window</b>	Tempered glass, T=4mm
<b>Cable gland</b>	IP68 PG-9 PA66
<b>Gasket</b>	Glass and housing are silicone sealed
<b>LED</b>	Single color ORSAM LED
<b>Operating temperature</b>	-20°C~40°C
<b>Bracket</b>	Hard chrome plated stainless steel SUS 304#
<b>Power Cable</b>	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage)

**Optional Honeycomb Louver**



**TECHNICAL DATA**

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
<b>B6KC1257</b>	12×1.5W	B17	20°	120/240V	120V = 203 240V = 109	120V = 24.4 240V = 25.2	Cool white=1637 Warm white=1392	05
<b>B6KC2457</b>	24×1.5W	B17	20°	120/240V	120V = 414 240V = 212	120V = 48.0 240V = 48.3	Cool white=3270 Warm white=2780	05