

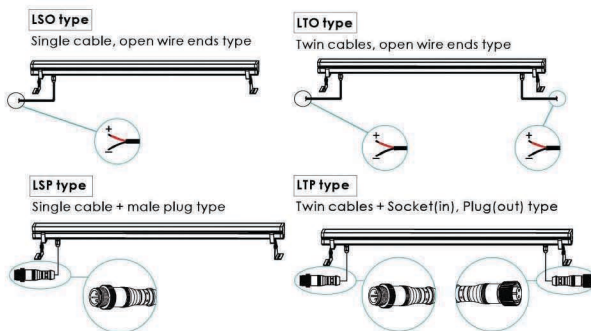


# IP-65 Slim Type Linear Light Bar

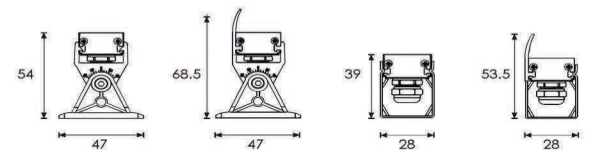

## OUTER DIMENSIONS & ACCESSORIES

Unit:mm

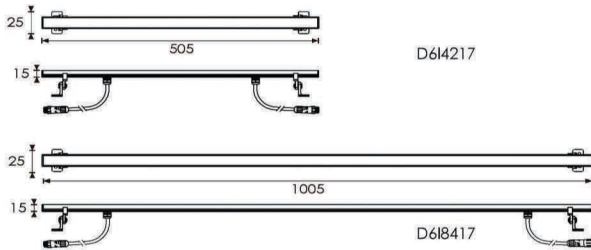

## LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

## OPTICS

N/A

## MATERIAL SPECIFICATIONS

- HOUSING** | Aluminum anodized finishing & powder painting
- DIFFUSE** | PC T=2mm
- CABLE GLAND** | Copper and nickel coated
- LED** | SMD2835
- PCB** | Heat Conductivity≥2.0w/mk
- LED DRIVER** | Constant current IC on the board
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H03VV-F 2X0.75mm<sup>2</sup> L=option
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali

## OPTIONAL PARTS



•Stainless Steel Bracket



•Plug/Socket Connector



•Cap-Optional Accessory



•Cap-Optional Accessory



The cap can effectively :  
1. Reduce the people view angle to the light  
2. concentrate the brightness

The bracket of Rotatable type

Regular



The bracket of Angle-Fixed type

Option



•Bracket

## TECHNICAL DATA

ITEM	LIGHT SOURCE	LENGTH(MM)	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	PF	IK
<b>D614217</b>	42×0.2W	505	120°	24V DC	350	8.5	Cool White = 430 Warm White = 418	1	02
<b>D618417</b>	84×0.2W	1005	120°	24V DC	700	17	Cool White = 994 Warm White = 867	1	02

## PHOTOMETRIC CURVES

