

Linear Lighting Beam Wall Washer



LED COLOUR TEMPERATURE

2000K · 3000K · 6000K


OPTICS




OUTER DIMENSIONS & ACCESSORIES

Unit:mm

Low voltage input (24VDC)

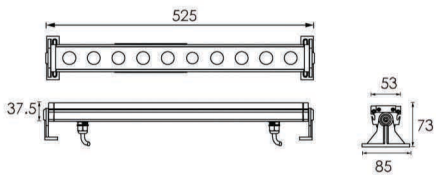

S6Q1057


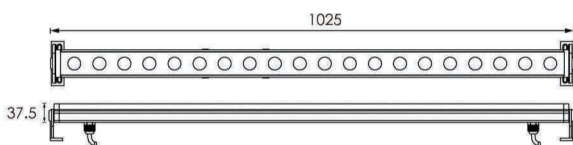


S6Q2057

MATERIAL SPECIFICATIONS

- HOUSING** | Extruded aluminum, powder coated
- LENS** | Optical lens, efficiency ≥ 85%
- LIGHT WINDOW** | Tempered glass, T=3mm
- CABLE GLAND** | IP68 PG-9 PA66
- GASKET** | Glass and housing are silicone sealed
- LED** | OSRAM or NICHIA
- OPERATING TEMPERATURE** | -20°C ~ 40°C
- BRACKET** | 12# Die-casting powder coated aluminum
- POWER CABLE** | 2XH05RN-F 2X1.0mm² L=0.5m(Low Voltage)
| 2XH05RN-F 3X1.0mm² L=0.5m(High Voltage)
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali

Low voltage input (24VDC) power cord model

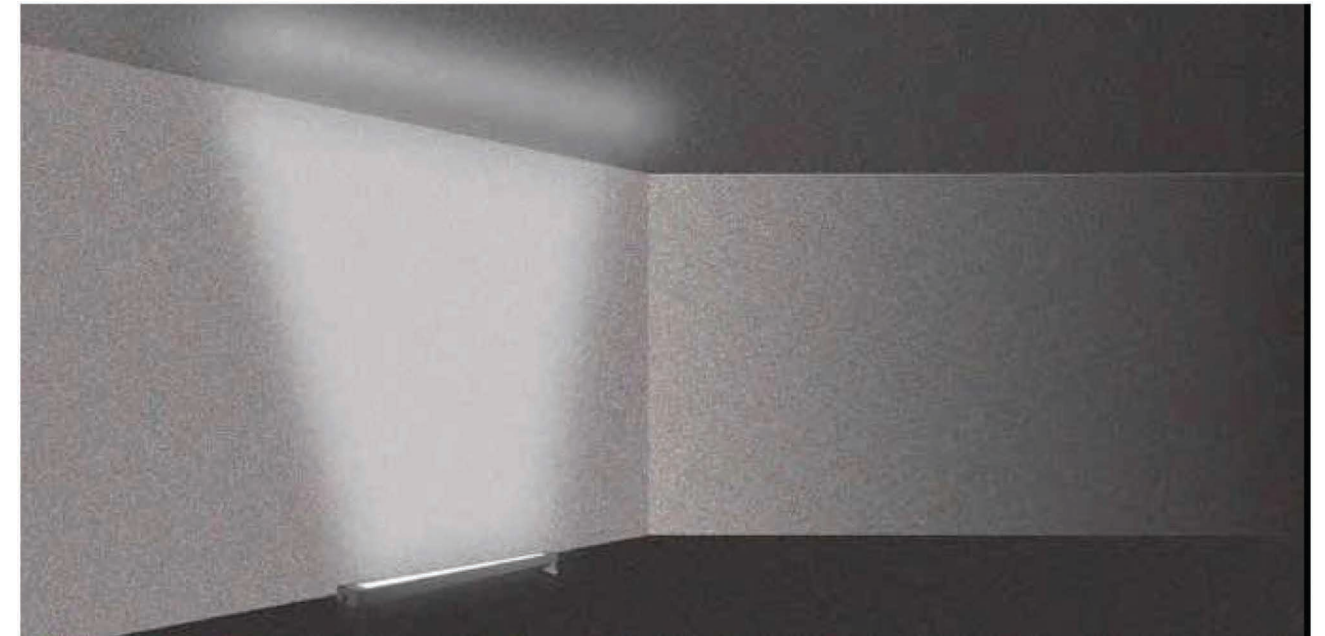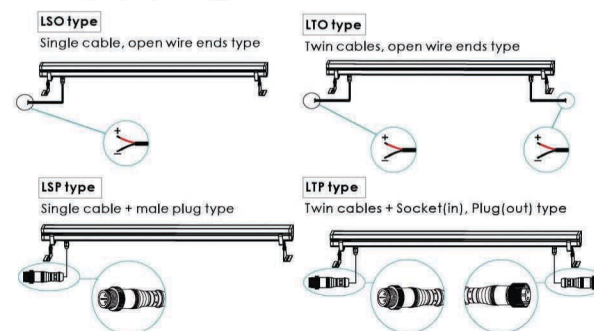

• Adjustable beam direction

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	LENGTH(MM)	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
S6Q1057	10x2W	B13	10°X35°	525	24V DC 120/240	24V = 1041	24V = 25	Cool White = 1840 Warm White = 1510	0.5
						120V = 174	120V = 20.8		
						240V = 92	240V = 20.8		
S6Q2057	20x2W	B13	10°X35°	1025	24V DC 120/240	24V = 2056	24V = 50	Cool White = 3580 Warm White = 2945	0.5
						120V = 374	120V = 41		
						240V = 202	240V = 42		

PHOTOMETRIC CURVES

